


Power Step 2H042MH

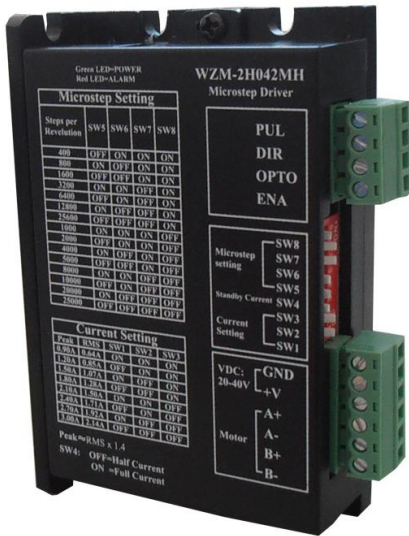

Key Features:

- DCDC20–40V Supply Voltage
- H-Bridge, 2 Phase Bi-polar Micro-Stepping Drive
- Suitable for 2-phase, 4, 6 and 8 leads step motors
- Output current selectable from 0.9A–3A peak
- Current reduction by 50% automatically, when motor standstill mode is enabled
- Pulse Input frequency up to 200 kHz
- Optically isolated differential TTL inputs for Pulse, Direction and Enable signal inputs
- Selectable resolutions up to 25600steps
- Over Voltage, Coil to Coil and Coil to Ground short circuit protection.

Introduction

2H042MH is a cost effective, high performance bi-polar two phase micro-stepping drive applying pure-sinusoidal current control technique. It is best suited for the applications that desired extreme low noise and heat. It operates well in an environment, where electricity supply experience instability and fluctuation.

The general pseudo-sinusoidal current control technology adopted by majority of the drive produced distorted sine wave, and current ripple, resulting in vibration, noise and motor heating. This results in motor degrading over time, reducing in motor performance and shortens the usage life.

With an automatic optimization speed control technique, the PowerStep series drive output is very stable, with almost zero vibration and noise, performing close to a servo system, allowing the motor to operate smoothly. That helps to fulfill a design requirement of low noise, low heat and high performance.

Specifications


Parameters	Min	Typical	Max	Unit
Output Current (Peak)	0.9	-	3	Amps
Supply voltage	DC20V	36	40	VDC
Logic Input Current	7	10	16	mA
Pulse input frequency	0	-	200	KHz
Low Level Time	2.5			µsec

Cooling	Natural Cooling or Forced Convection
---------	--------------------------------------

Environment	Space	Avoid dust, oil frost and corrosive gases
	Ambient Temperature	0°C – 50°C
	Humidity	40 – 80%RH
	Vibration	5.9m/s ² Max
Storage Temp.	-10°C – 80°C	
Weight	Approx.150 gram	

Dimensions

Dimensions in mm

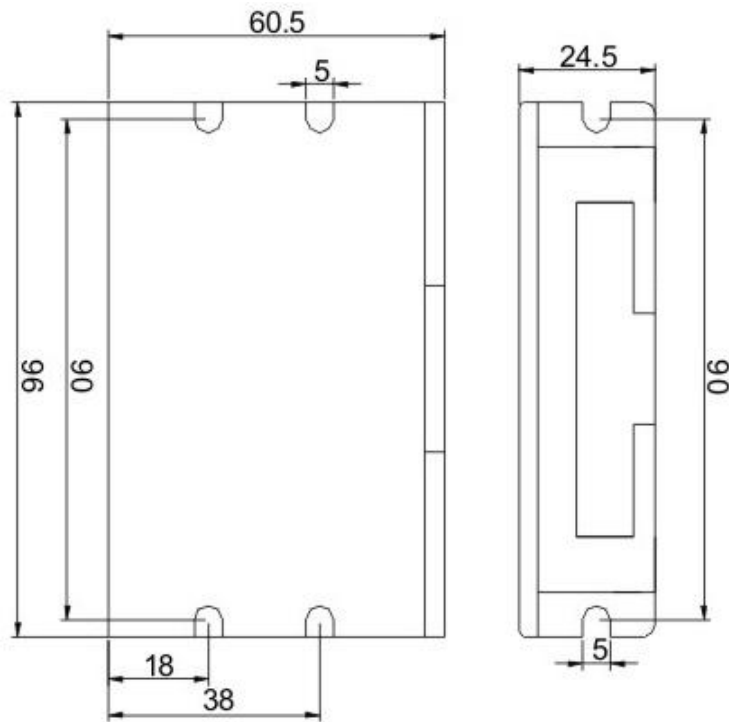

Current Setting

Current Setting (A)	SW1	SW2	SW3
0.90A	ON	ON	ON
1.20A	OFF	ON	ON
1.50A	ON	OFF	ON
1.80A	ON	ON	OFF
2.10A	OFF	OFF	ON
2.40A	OFF	ON	OFF
2.70A	ON	OFF	OFF
3.00A	OFF	OFF	OFF

Microstep Setting



Step / Rev	SW5	SW6	SW7	SW8
400	OFF	ON	ON	ON
800	ON	OFF	ON	ON
1600	OFF	OFF	ON	ON
3200	ON	ON	OFF	ON
6400	OFF	ON	ON	ON
12800	ON	OFF	OFF	ON
25600	OFF	OFF	OFF	ON
1000	ON	ON	ON	OFF
2000	OFF	ON	ON	OFF
4000	ON	OFF	ON	OFF
5000	OFF	OFF	ON	OFF
8000	ON	ON	OFF	OFF
10000	OFF	ON	OFF	OFF
20000	ON	OFF	OFF	OFF
25000	OFF	OFF	OFF	OFF

* SW4: ON=Full current, SW4 : OFF=Half current


Pin Assignment

Signal	Function and Descriptions
PUL	<u>Pulse or Step Input</u> TTL differential input with high-going pulse, 1 μ s min width. For +5V or +24V operation, a current limiting resistor had to be pull up or connected in series from the PLS+ to the VCC.
DIR	<u>Direction Input</u> Logic High = positive (CW) rotation—4.0 ~ 5.0V Logic Low = negative (CCW) rotation—0 ~ 0.5V The DIR signal must be stable for at least 5ms before the drive receives the first pulse.
+5V	Input signal is positive power supply
ENA	<u>Enable Input</u> Logic High = Drive Enabled Logic Low = Drive Disabled This input, if left unconnected, is recognised as Logic High by the drive, and it will be enabled.

Pin Assignment

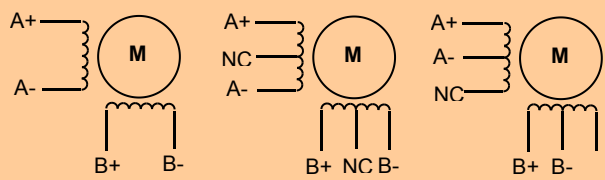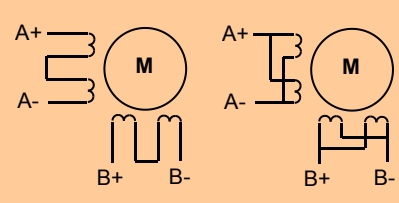P2 Signal	Function and Descriptions
GND	DC Power Ground
+V	DC Power Supply, DC20V -40VDC
A+, A-	 <p>4 Leads Motor Full Coil Half Coil</p> <p style="text-align: center;">6 Leads Motor</p>
B+, B-	 <p>Series Parallel</p> <p style="text-align: center;">8 Leads Motor</p>

Wiring

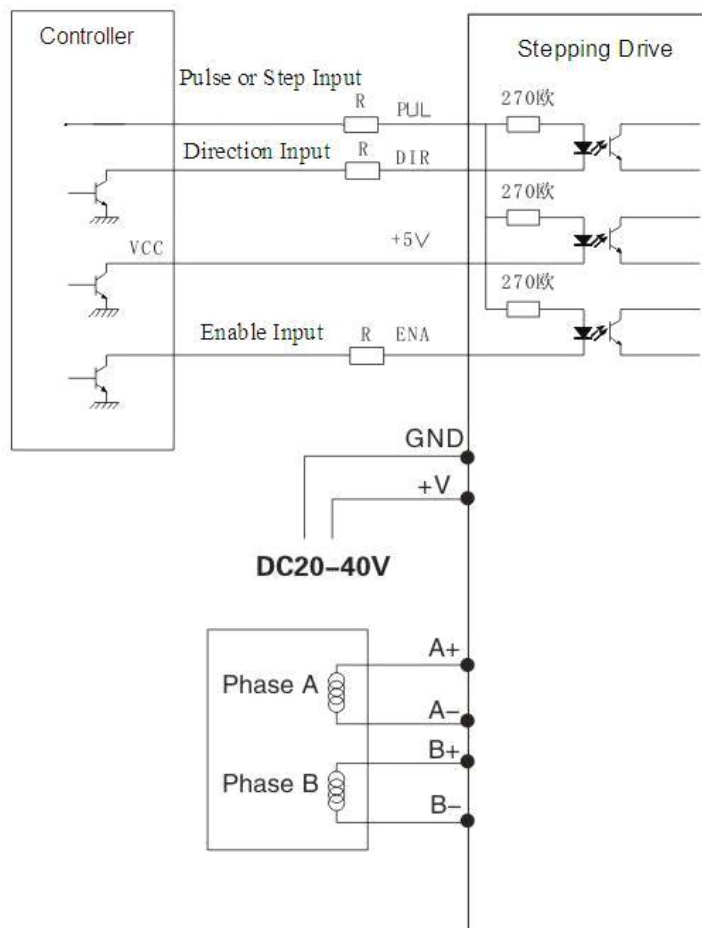

R=0 if VCC=5V

R=1K(Power>0.125W) if VCC=12V;

R=2K(Power>0.125W) if VCC=24V;

R must be connected to control signal terminal.