

DM-37RS3540 DC SPUR GEAR MOTOR


基本电压/Main Voltage : 6VDC、12VDC、24VDC

典型应用/Typical Applications :

仪器仪表、电动工具、咖啡机、自动贩卖机、按摩器、游戏机、电动开窗器、自动化设备等。
Instrument, Electric tools, Coffee machine, Vending machine, Massager, Game machine, Electric window opener, Automation equipment



APPEARANCE SIZE

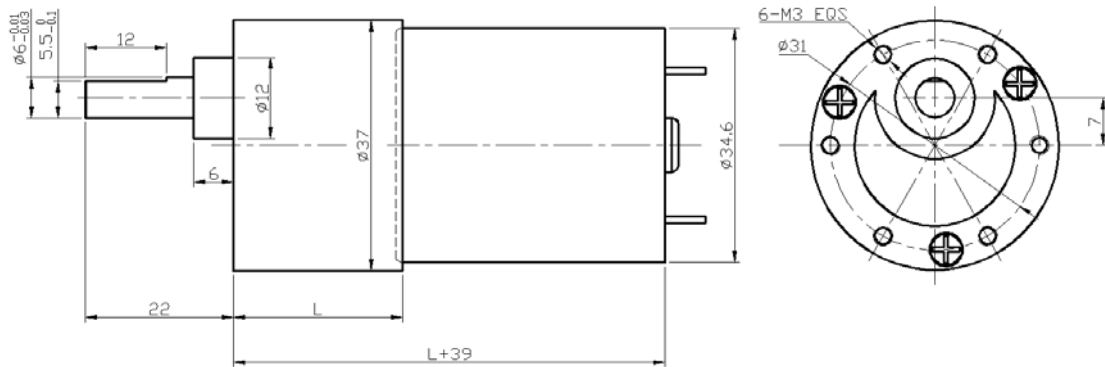

减速箱参数/Gearbox Data:

级数 Number of stages	2	3	4	5	6	7
减速比 Reduction ratio	6.8、10	20、30	61、90	122、184、270	311、414 534、552、810	1243、1656、2430
减速箱长度 Gearbox length "L" mm	19	22.5	25	27.5	30	31.5
破坏扭矩 Breaking torque(kgf.cm)	8	10	30	30	40	40
减速箱效率 Gearbox efficiency	81%	72%	65%	59%	53%	47%

电机参数/Driving Motor Data:

电机型号 Motor model	额定电压 Rated Volt.	空载/No load		负载/Load				堵转/Stall	
		电流 Current	转速 Speed	电流 Current	转速 Speed	扭矩 Torque	输出功率 Output power	扭矩 Torque	电流 Current
		V	mA	r/min	mA	r/min	g.cm	W	g.cm
DM-3540-012-3000	12	≤50	3000	≤300	2200	60	1.4	≥240	≥800
DM-3540-012-4500	12	≤70	4500	≤500	3300	70	2.4	≥500	≥2000
DM-3540-012-6000	12	≤100	6000	≤700	4500	80	3.7	≥600	≥2500
DM-3540-024-3000	24	≤25	3000	≤150	2200	60	1.4	≥220	≥500
DM-3540-024-4500	24	≤35	4500	≤250	3300	70	2.4	≥240	≥800
DM-3540-024-6000	24	≤50	6000	≤350	4500	80	3.7	≥550	≥1400

备注/Remark:

齿轮减速箱额定扭矩 = 电机额定扭矩 * 减速比 * 减速箱效率

Gear Motor Torque = Driving motor torque * Reduction ratio * Gearbox efficiency;

齿轮减速箱额定转速 = 电机额定转速 / 减速比

Gear Motor Speed = Driving motor speed / Reduction ratio

电机具体配置可根据客户的要求进行定制, 像电压, 速度, 以及轴的长度和形状...

Motor detailed config can be customized according to customer's requests, like voltage, speed, as well as shaft length and shape...

欢迎OEM或ODM项目

Welcome OEM or ODM projects