

DM-13SS030 DC SPUR GEAR MOTOR

基本电压/Main Voltage : 3VDC、6VDC、12VDC


典型应用/Typical Applications :

仪器仪表、数码产品、自动门锁、医疗器械、安防监控

Instrument, Digital product, Automatic door-lock, Medical equipment, Security monitoring



APPEARANCE SIZE

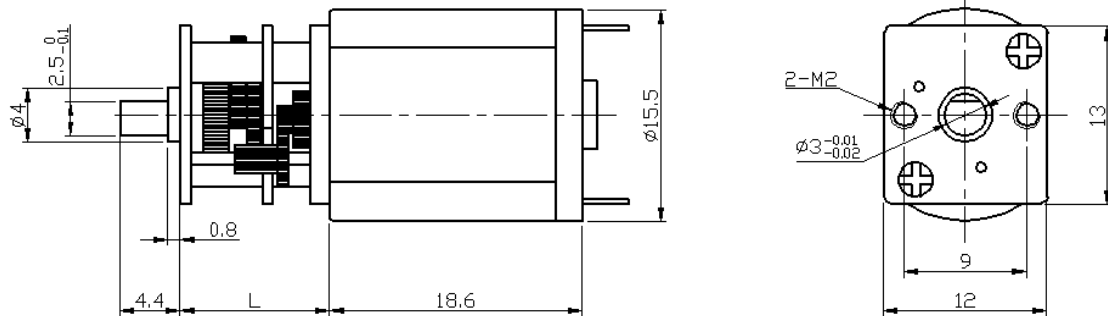

减速箱参数/Gearbox Data:

级数 Number of stages	2	4	5
减速比 Reduction ratio	3、7、10	16、17、20、30、35 50、63、70、86	115、150、210、250、360
减速箱长度 Gearbox length "L" mm	11	11	11
破坏扭矩 Breaking torque(kgf.cm)	0.6	0.9	2
减速箱效率 Gearbox efficiency	81%	65%	59%

电机参数/Driving Motor Data:

电机型号 Motor model	额定电压 Rated Volt.	空载/No load		负载/Load				堵转/Stall	
		电流 Current	转速 Speed	电流 Current	转速 Speed	扭矩 Torque	输出功率 Output power	扭矩 Torque	电流 Current
		V	mA	r/min	mA	r/min	g.cm	W	g.cm
DM-030-003-8000	3	≤55	8000	≤250	6000	4	0.2	≥16	≥500
DM-030-003-10500	3	≤80	10500	≤300	7200	5	0.4	≥20	≥750
DM-030-006-8000	6	≤30	8000	≤120	5000	4	0.2	≥16	≥150
DM-030-006-10500	6	≤40	10500	≤160	7000	5	0.4	≥20	≥400

备注/Remark:

齿轮减速箱额定扭矩 = 电机额定扭矩 * 减速比 * 减速箱效率

Gear Motor Torque = Driving motor torque * Reduction ratio * Gearbox efficiency;

齿轮减速箱额定转速 = 电机额定转速 / 减速比

Gear Motor Speed = Driving motor speed / Reduction ratio

电机具体配置可根据客户的要求进行定制，像电压，速度，以及轴的长度和形状...

Motor detailed config can be customized according to customer's requests,

like voltage, speed, as well as shaft length and shape...

欢迎OEM或ODM项目

Welcome OEM or ODM projects