



**MILISCORP**

MAST SECTION

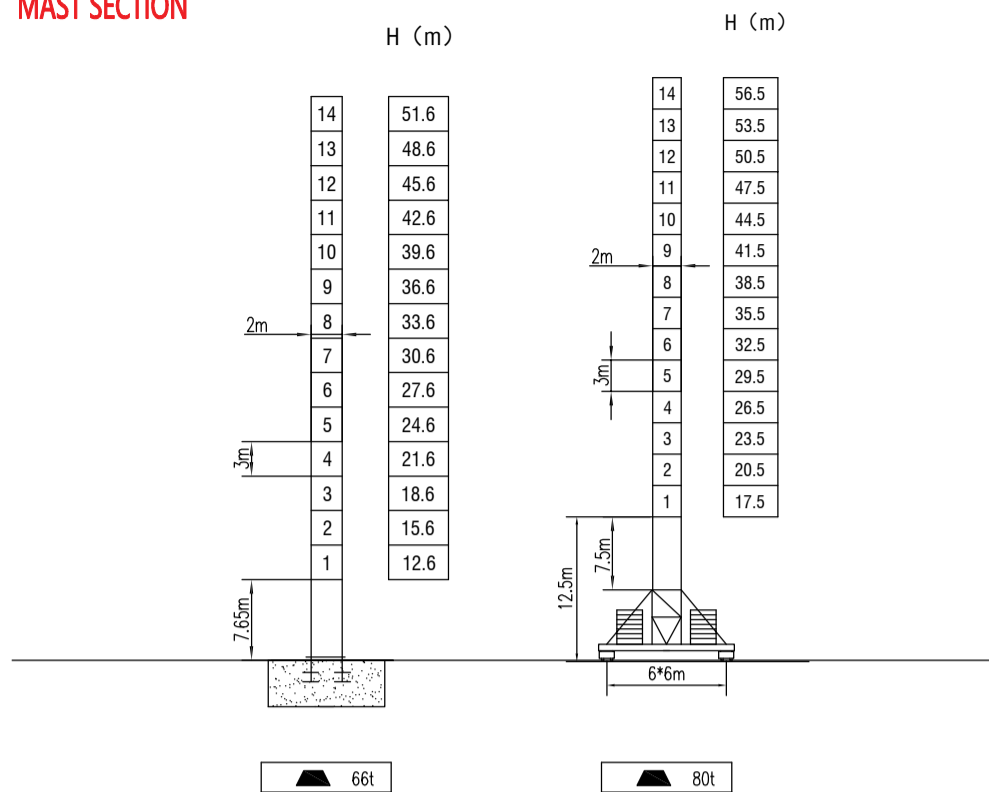

F REACTIONS	○ IN SERVICE ■ OUT OF SERVICE	▲ WITH LONGEST JIB AND FREE HEIGHT ▲ SELF LOAD WITHOUT LOAD AND COUNTER-WEIGHT
-------------	----------------------------------	---

ANCHORAGES

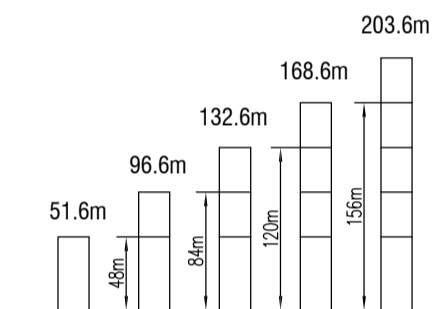

LOAD DIAGRAMS

Radius	2.5	R(Cmax)m/t	15	20	25	30	35	40	45	50	55	60	65	70	m
70m	☞	15.4 / 12.0	12.0	8.91	6.86	5.52	4.58	3.88	3.33	2.9	2.55	2.26	2.01	1.8	t
		28.6 / 6.0	6.0												t
65m	☞	16.6 / 12.0	12.0	9.69	7.5	6.07	5.05	4.3	3.72	3.26	2.88	2.56	2.3		t
		31.2 / 6.0	6.0												t
60m	☞	17.9 / 12.0	12.0	10.56	8.21	6.67	5.58	4.77	4.14	3.64	3.24	2.9		t	
		34.0 / 6.0	6.0												t
55m	☞	19.0 / 12.0	12.0	11.31	8.8	7.16	5.99	5.13	4.46	3.93	3.5			t	
		36.0 / 6.0	6.0												t
50m	☞	19.0 / 10.0	12.0		9.35	7.61	6.38	5.47	4.76	4.2				t	
		39.0 / 6.0	6.0												t
45m	☞	20.0 / 12.0	12.0		9.6	7.82	6.56	5.62	4.9					t	
		35.0 / 6.0	6.0												t


COUNTER-JIB BALLAST

Jib Length	Ballast Weight
70m	18.96t
65m	18.96t
60m	18.25t
55m	17.42t
50m	16.59t
45m	15.88t

TECHNICAL PARAMETER

MECHANISMS		☞		☞		☞		☞		kw		
Hoisting	▲	55LVF	m/min	0-40	0-80	0-120	0-20	0-40	0-60	630	55	
			t	6	3	1.5	12	6	3			
Hoisting	▲	70RCS30	m/min	40	80	20	40			>533	51.5	
			t	6	3	12	6					
Trolleying	◀▶	4TVF	0-55 m/min								4	
		4T3V4	7.5/28/57 m/min								95Nm	
Slewing	☺	9SVF	0-0.6 r/min								9*2	
		RCV145	0-0.8 r/min								145Nm*2	
Travelling	◀▶	4TVF	0-30 m/min								4*4	
Power supply		380v.50Hz / 440v.60Hz										
Necessary electric power		115KVA										

INNER CLIMBING

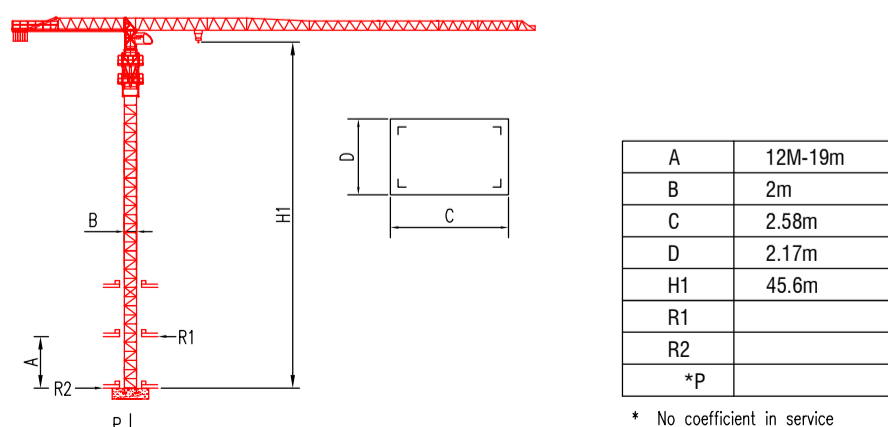

\* The technical information can not be published without approval. The specifications are not subject to legal constraints due to continually products improved, the performance data will be modified without notice.