





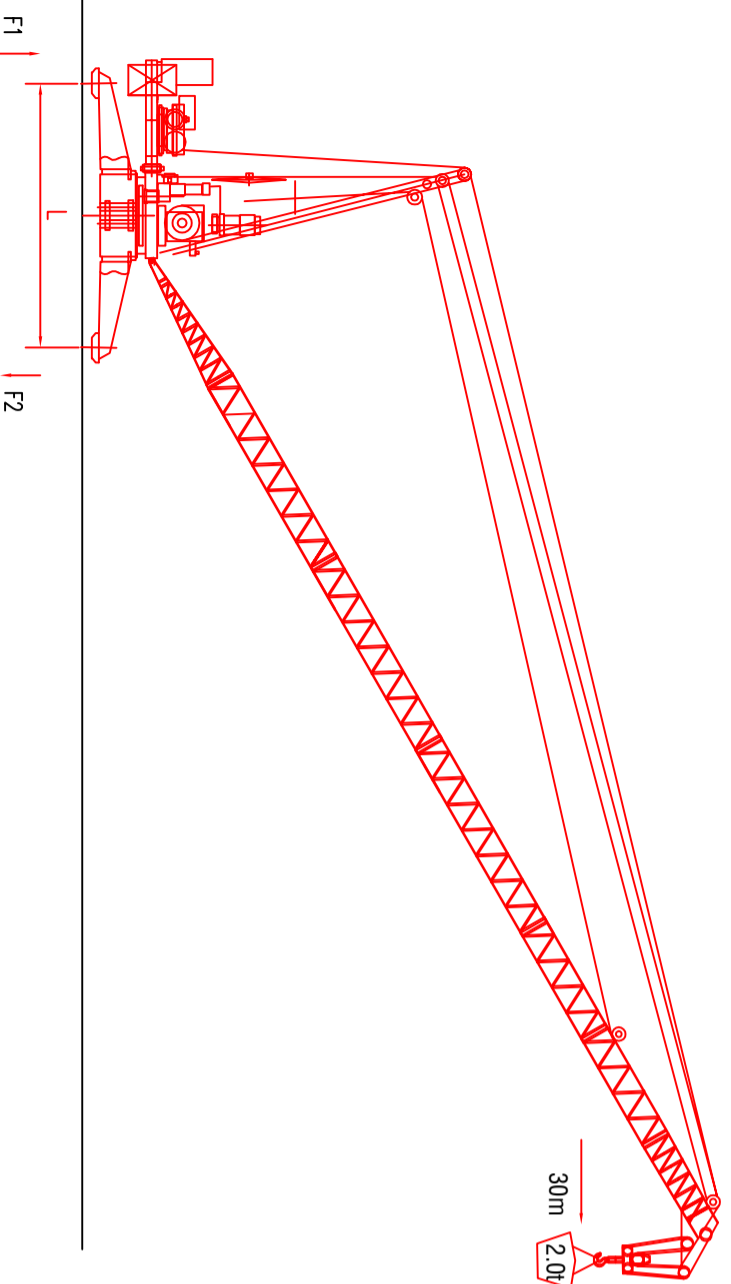




TECHNICAL PARAMETER

MECHANISMS											kw	
Hoisting		24LPC15	m/min	0-10	0-40	0-80	0-5	0-20	0-40	360	24	
			t	3	3	1.5	6	6	3			
Trolleying		15DFT10	m/min	(15°-84°)3								15
Slewing		RCV95	r/min	0-0.8								95Nm
Power supply			380V.50Hz / 440V.60Hz									
Necessary electric power			50KVA									



L (m)	F1 (t)	F2 (t)	Weight (t)
5.445	16.9	28.2	11.9

LOAD DIAGRAMS

R(m)	18.5	22	24	25	26	26	28	30	m
	6.0	6.0	6.0	6.0	5.6	3.9	1.9		t
	3.0	3.0	3.0	3.0	3.0	3.0	3.0		t