



MILISCORP

MAST SECTION

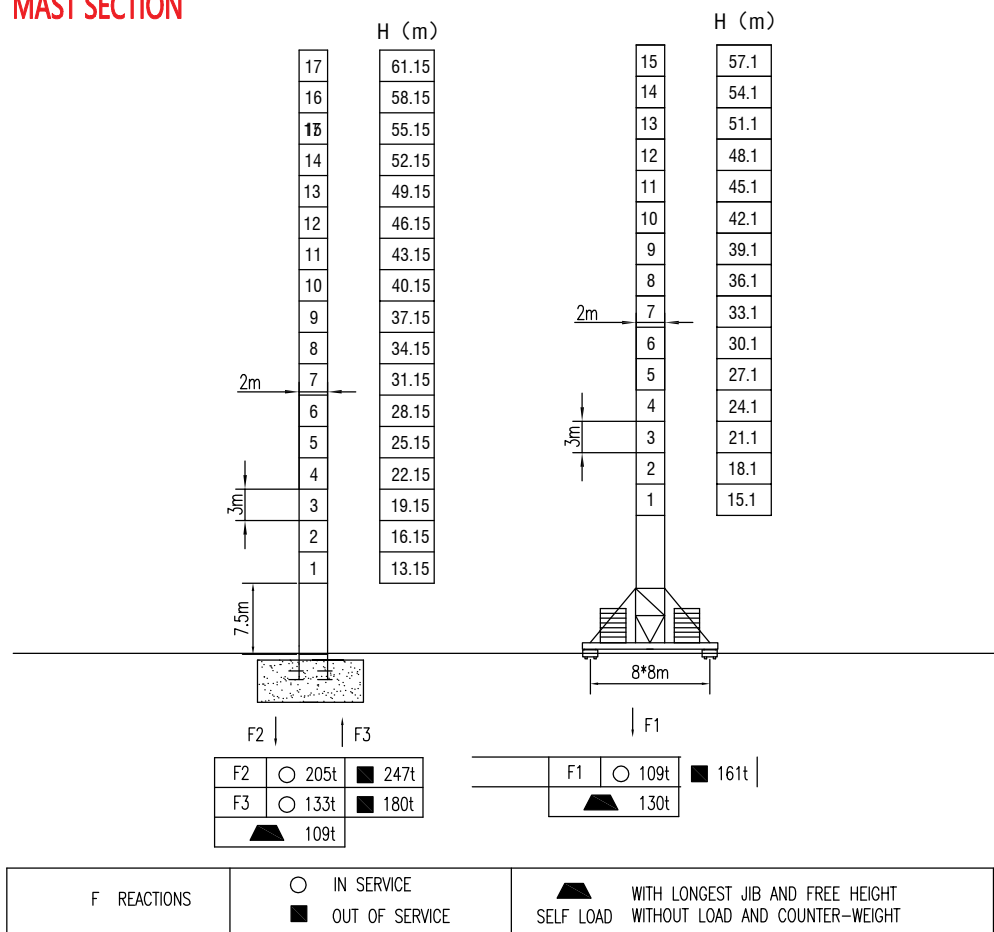

ANCHORAGES

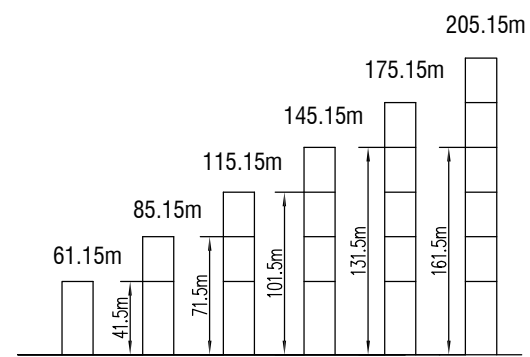

LOAD DIAGRAMS

Radius	3.5	R(Cmax)m/t	15	20	25	30	35	40	45	50	55	60	65	70	75	m
75m	☞	13.7/20.0	17.94	12.87	9.9	7.69	6.59	5.85	4.79	4.16	3.65	3.23	2.87	2.56	2.3	t
	☜	29.7/10.0		10.0	8.36	6.99	5.35	5.19	4.56	4.05	3.63	3.27	2.96	2.7		t
70m	☞	14.8/20.0	19.7	14.18	10.97	8.86	7.39	6.34	5.41	4.73	4.18	3.72	3.33	3.0		t
	☜	28.2/10.0		10.0	9.33	7.83	5.92	5.84	5.16	4.59	4.13	3.74	3.4			t
65m	☞	16.2/20.0	20.0	15.76	12.22	9.89	8.26	7.12	6.1	5.35	4.74	4.23	3.8			t
	☜	30.9/10.0		10.0	8.7	6.72	6.52	5.76	5.14	4.63	4.2					t
60m	☞	17.4/20.0	20.0	17.1	13.29	10.79	9.03	7.81	6.71	5.9	5.25	4.7				t
	☜	33.4/10.0		10.0	9.48	7.41	7.13	6.31	5.65	5.1						t
55m	☞	18.6/20.0	20.0	18.39	14.71	11.64	9.75	8.44	7.27	6.4	5.7					t
	☜	35.6/10.0		10.0	8.04	7.68	6.81	6.1								t
50m	☞	19.0/20.0	20.0	18.9	14.71	11.97	10.04	8.68	7.49	6.6						t
	☜	36.5/10.0		10.0	8.28	7.89	7.0									t
45m	☞	19.3/20.0	20.0	19.17	14.93	12.15	10.19	8.81	7.6							t
	☜	36.9/10.0		10.0	8.41	8.0										t


COUNTER-JIB BALLAST

Jib Length	Counterweight Capacity
75m	29.4t
70m	28.25t
65m	27.1t
60m	24.5t
55m	24.5t
50m	22.2t
45m	19.6t

TECHNICAL PARAMETER

MECHANISMS		Hoisting		Trolleying		Slewing		Power supply	
Hoisting	90LFT50	m/min	0-45	0-96	0-22	0-45			
		t	10	5	20	10	500	90	
Trolleying	11DFT10	0-65 m/min						11	
Slewing	145RCV12	0-0.7 r/min						145NMx4	
Power supply	380v.50Hz / 440v.60Hz								
Necessary electric power	155KVA								

INNER CLIMBING

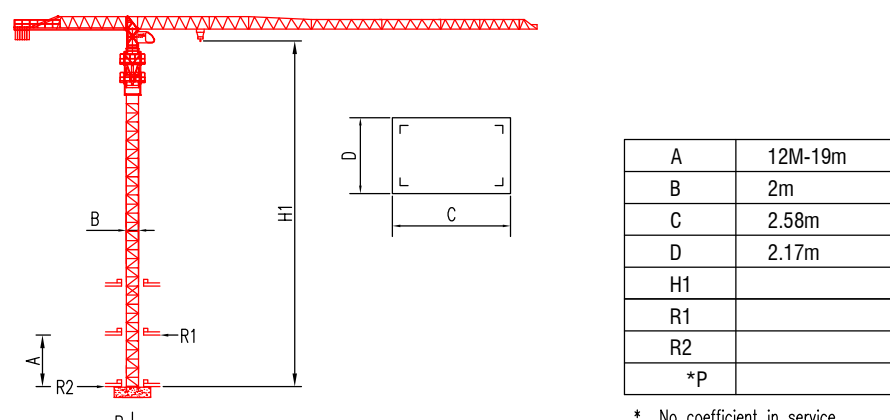

* The technical information can not be published without approval. The specifications are not subject to legal constraints due to continually products improved, the performance data will be modified without notice.