



ITTE MILISCORP

MAST SECTION

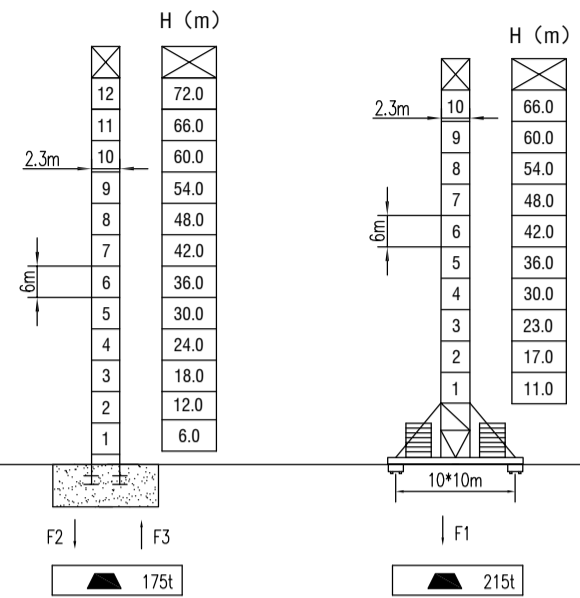

F REACTIONS	○ IN SERVICE ■ OUT OF SERVICE	▲ WITH LONGEST JIB AND FREE HEIGHT ▲ SELF LOAD WITHOUT LOAD AND COUNTER-WEIGHT
-------------	----------------------------------	---

ANCHORAGES

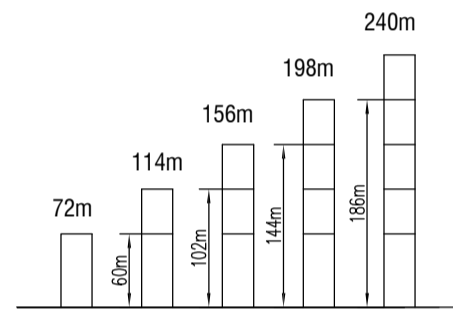

LOAD DIAGRAMS

Radius	3.8	R(Cmax)m/t	20	25	30	35	40	45	50	55	60	65	70	75	80	85	m
85m	☺ ☾	10.9/32.0	15.22	11.88	9.53	7.84	6.43	5.47	4.7	4.08	3.56	3.12	2.75	2.43	2.15	1.9	t
		19.9/16.0	15.92	12.38	10.0	8.34	6.91	5.95	5.19	4.57	4.05	3.62	3.25	2.93	2.65	2.4	t
80m	☺ ☾	12.5/32.0	17.98	13.93	11.23	9.37	7.76	6.64	5.76	5.03	4.44	3.93	3.5	3.13	2.8		t
		22.5/16.0	16.0	14.43	11.73	9.81	8.14	7.0	6.18	5.48	4.98	4.44	3.98	3.62	3.3		t
70m	☺ ☾	16.6/32.0	25.43	19.93	16.27	13.65	11.61	10.09	8.88	7.89	7.08	6.39	5.8				t
		31.4/16.0		16.0	14.15	12.14	10.61	9.39	8.39	7.58	6.89	6.3					t
60m	☺ ☾	18.8/32.0	29.16	22.9	18.78	15.5	13.27	11.73	10.35	9.23	8.3						t
		35.5/16.0		16.0	13.98	12.24	10.86	9.73	8.8								t
50m	☺ ☾	21.1/32.0	32.0	26.35	21.57	18.15	15.75	13.57	12.0								t
		40.2/16.0		16.0	14.7	12.5											t

TECHNICAL PARAMETER

MECHANISMS													
Hoisting	⬆ ⬇	132LVF	m/min	0-36	0-68	0-102	0-18	0-34	0-51	640	m	kw	132
			t	16	8	4	32	16	8				
Trolleying	⬅ ➡	18DVF	0-60 m/min									18	
Slewing	⦿	145RCV	0-0.8 r/min									145NMx4	
Power supply			380v.50Hz / 440v.60Hz										
Necessary electric power			270KVA										

* The technical information can not be published without approval. The specifications are not subject to legal constraints due to continually products improved, the performance data will be modified without notice.