


| H.265 4.0/5.0MP CCTV Video Surveillance IR Bullet IP HD Camera                    |                                                                                                                            |                                                                |  |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|--|
|  | Specification                                                                                                              |                                                                |  |
|                                                                                   | Product Name                                                                                                               | H.265 4.0/5.0MP CCTV Video Surveillance IR Bullet IP HD Camera |  |
|                                                                                   | Model No.                                                                                                                  | WDM-HIP9400CH                                                  |  |
|                                                                                   | Video                                                                                                                      |                                                                |  |
|                                                                                   | System                                                                                                                     | Hi3516EV300+Sony IMX335                                        |  |
|                                                                                   | Sensor                                                                                                                     | 1/2.8" 4.0/5.0M Pixels Progressive CMOS Image Sensor           |  |
|                                                                                   | Output resolution                                                                                                          | 5.0MP(2592x1944), 4.0MP(2592x1520)                             |  |
|                                                                                   | D/N Mode                                                                                                                   | Auto switching,black and white video and IR cut action linkage |  |
|                                                                                   | Illumination                                                                                                               | 0.001Lux@F1.2 (Color), 0Lux@F1.2(B/W)                          |  |
|                                                                                   | SNR                                                                                                                        | ≥50db(AGC OFF)                                                 |  |
|                                                                                   | Gain Control                                                                                                               | Auto                                                           |  |
|                                                                                   | DNR                                                                                                                        | 2D, 3DNR                                                       |  |
|                                                                                   | WDR                                                                                                                        | DWDR                                                           |  |
|                                                                                   | Video processing                                                                                                           | H.265/H.264 video compression, dual streaming                  |  |
|                                                                                   |                                                                                                                            | AVI format, 0.5M~8Mbps adjustable;                             |  |
| Video Output                                                                      | Main streaming                                                                                                             | 2592*1944,2592*1520,2560*1440,2048*1520,2304*1296,1920*1080    |  |
|                                                                                   | Sub streaming                                                                                                              | 800*448,720*480,640*480,640*360,480*360,352*288                |  |
| Frame rate                                                                        | 2592*1944@15fps, 2592*1520@25fps                                                                                           |                                                                |  |
| Network interface                                                                 | RJ45 ethernet,10/100M;RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP protocol supported                                                 |                                                                |  |
| Access Protocol                                                                   | Standard ONVIF Protocol, Support third party access; PC;                                                                   |                                                                |  |
|                                                                                   | Support IE6.0 and above Smartphone                                                                                         |                                                                |  |
|                                                                                   | Support Android\iPhone                                                                                                     |                                                                |  |
| Lens                                                                              |                                                                                                                            |                                                                |  |
| Lens                                                                              | Standard 4mm lens(6mm lens or 2.7-13.5mm auto lens optional)                                                               |                                                                |  |
| View Angle                                                                        | 4mm lens(6MP F2.0 1/2.8" H 80.7°); 6mm lens(6MP F2.0 1/2.8" H 52.7°); 2.7-13.5mm auto lens(6MP F1.3 1/2.8" H 108.8°-28.8°) |                                                                |  |
| IR distance                                                                       | 20-25m(36pcs F5 IR leds)                                                                                                   |                                                                |  |
| Function                                                                          |                                                                                                                            |                                                                |  |
| Function                                                                          | Support WEB configuration, OSD,real-time video transmission                                                                |                                                                |  |
|                                                                                   | Support motion detection                                                                                                   |                                                                |  |
|                                                                                   | Support front end storage ,playback and download                                                                           |                                                                |  |
|                                                                                   | Support uniform client and platform system application                                                                     |                                                                |  |
|                                                                                   | Support complete SDK for second development.                                                                               |                                                                |  |
| Normal                                                                            |                                                                                                                            |                                                                |  |
| Material                                                                          | Metal Case, White+Black                                                                                                    |                                                                |  |
| Weather Proof                                                                     | IP66 Waterproof, Weather Resistance                                                                                        |                                                                |  |
| Power supply                                                                      | DC12V/POE(24W) optional                                                                                                    |                                                                |  |
| Operation temperature                                                             | -20°C~+60°C,10%~90%RH                                                                                                      |                                                                |  |

### Features

- \* Hisilicon high-performance DSP
- \* High quality progressive scanning CMOS
- \* H.265/H.264 High profile
- \* Support dual stream, support mobile phone
- \* Support power supply DC12V/POE
- \* Standard ONVIF Protocol, support multi network protocols
- \* Metal case, Waterproof IP66

### Dimension

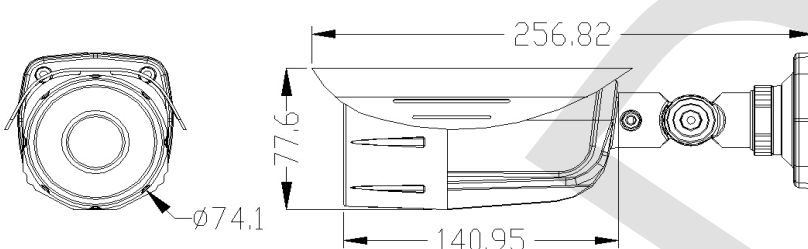

### Accessories

- User Manual
- CD
- Screw fittings