


**CCTV H.265 4.0MP IR Bullet Security Surveillance HD IP Camera**



**Features**

- \*Hisilicon high-performance DSP
- \*High quality progressive scanning CMOS
- \*H.265 High profile
- \*support dual stream, support mobile phone
- \*support power supply DC12V/POE
- \*Standard ONVIF Protocol
- \*Complete SDK for second development. Support multi network protocols
- \*Provide a unified free client to achieve video recording/playback/preview
- \*Support ICR filter switching function, day and night surveillance
- \*Waterproof IP66

**Dimension**

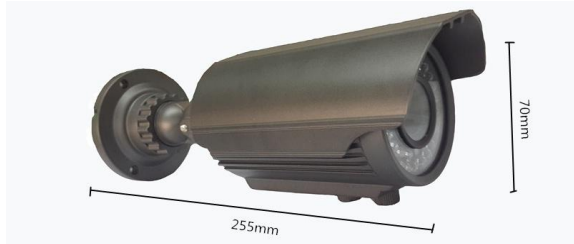

**Accessories**

- User Manual
- CD
- Screw fittings

| Specification         |   |
|-----------------------|---|
| Product Name          | <b>CCTV H.265 4.0MP IR Bullet Security Surveillance HD IP Camera</b>  |
| Model No.             | WDM-IP8010RD  |
| Video                 |   |
| System                | Hisilicon high-performance DSP, Hi3516D+OV4689  |
| Sensor                | 1/3" 4.0M Pixels Progressive OV4689 CMOS Image Sensor   |
| Output resolution     | 2592(H)×1520(V)   |
| D/N Mode              | Auto switching,black and white vide and IR cut action linkage   |
| Illumination          | Color 1.0Lux@F1.2,Black 0.1 Lux@F1.2  |
| Video processing      | H.265 video compression, dual streaming<br>AVI format, 0.1M~6Mbps adjustable;   |
| Video Output          | Main streaming: 2592*1520, 2018*1536, 1920*1080, 1280*960, 1280*720,1024*768,1280*720;<br>Sub streaming: 960*540,640*360,480*270,352*288,320*240,352*192, 320*192,288*192,256*192   |
| Frame rate            | 4.0MP 25/30 frame(full real time),support 1~30frame/seconds adjustable  |
| Network interface     | RJ45 ethernet,10/100M;RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP protocol supported  |
| Access Protocol       | Standard ONVIF Protocol, Support third party access; PC;<br>Support IE6.0 and aboveSmartphone<br>Support Android/iPhone   |
| Lens                  |   |
| Lens                  | 2.8-12mm lens   |
| IR distance           | 40m(42pcs f5 IR leds)   |
| Function              |   |
| Function              | Support WEB configuration, OSD,real-time video transmission<br>Support motion detection<br>Support front end storage ,playback and download<br>Support uniform client and platform system application<br>Support complete SDK for second development. |
| Normal                |   |
| Power supply          | DC12V/POE(optional)   |
| Operation temperature | -10°C~+60°C, 10%~90%RH  |