


**H.265 2.0MP CCTV Video Surveillance IR Bullet IP HD Camera**



**Features**

- \* Hisilicon high-performance DSP
- \* High quality progressive scanning CMOS
- \* H.265/H.264 High profile
- \* Support dual stream, support mobile phone
- \* Support power supply DC12V/POE
- \* Standard ONVIF Protocol, support multi network protocols
- \* Metal case, Waterproof IP66

**Dimension**

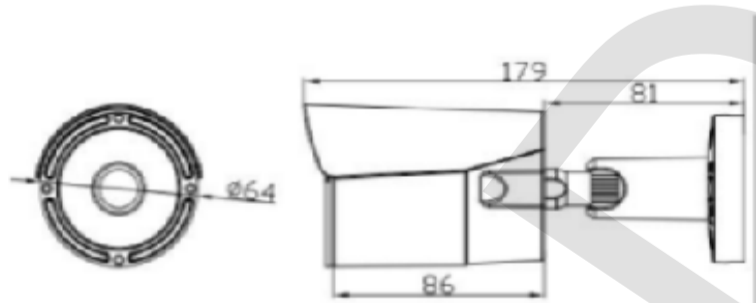

**Accessories**

- User Manual
- CD
- Screw fittings

**Specification**

Product Name	<b>H.265 2.0MP CCTV Video Surveillance IR Bullet IP HD Camera</b>	
Model No.	WDM-HIP9200A	WDM-HIP9200AH
<b>Video</b>		
System	Hi3516EV200+Sony IMX307	Hi3516D+Sony IMX290
Sensor	1/2.8" CMOS Sensor	
Output resolution	2.0MP(1920×1080)	
D/N Mode	Auto switching,black and white video and IR cut action linkage	
Illumination	Color: 0.001lux@F1.2; B/W: 0lux@F1.2	
SNR	≥50db(AGC OFF)	
Gain Control	Auto/ Manual	Auto
DNR	Support 2DNR, 3DNR	3DNR
WDR	DWDR(100dB)	>120dB
Video processing		
H.265/H.264 video compression, dual streaming		
AVI format, 0.7M~8Mbps adjustable;		
32KB ~16Mbps, support VBR, CBR		
Video Output	Main streaming	1920*1080,1280*960,1280*720
	Sub streaming	1920*1080,1280*720, D1,VGA,QVGA
		800*448,640*480,640*360,352*288
		D1, VGA, QVGA
Frame rate	2.0MP@30fps,support 7~30fps/s adjustable	1920*1080(1~25/30fps)
Network interface	RJ45 ethernet,10/100M;RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP protocol supported	
Standard ONVIF Protocol, Support third party access; PC;		
Access Protocol	Support IE6.0 and above Smartphone	
	Support Android/iPhone	
<b>Lens</b>		
Lens	Standard 4mm lens(6mm lens optional)	
View Angle	4mm lens(2MP F2.0 1/2.8" H 80.8°); 6mm lens(2MP F2.0 1/2.8" H 52.7°)	
IR distance	15-20m(36pcs F5 IR leds)	
<b>Function</b>		
Support WEB configuration, OSD,real-time video transmission		
Support motion detection		
Function	Support front end storage ,playback and download	
	Support uniform client and platform system application	
	Support complete SDK for second development.	
<b>Normal</b>		
Material	Metal Case, White	
Weather Proof	IP66 Waterproof, Weather Resistance	
Power supply	DC12V/POE(18W) optional	
Operation temperature	-20°C~+60°C,10%~90%RH	