


Wdm CCTV H.264 1.0/2.0MP Wireless WiFi HD Mini IP Camera



Features

- * Hisilicon high-performance DSP
- * High quality progressive scanning CMOS
- * H.264 High profile
- * Support dual stream, support mobile phone
- * Support power supply DC12V1A
- * Standard ONVIF Protocol
- * Complete SDK for second development. Support multi network protocols
- * Provide a unified free client to achieve video recording/playback/preview
- * Support ICR filter switching function, day and night surveillance

Dimension

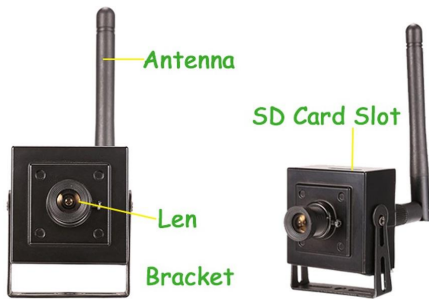

Accessories

- User Manual
- CD
- Screw fittings

Specification

Product Name	Wdm CCTV H.264 1.0/2.0MP Wireless WiFi HD Mini IP Camera	
Model No.	WDM-IP7903A-W	WDM-IP7903B-W
Video		
System	Hisilicon high-performance DSP, Hi3518EV200+OV9732	Hisilicon high-performance DSP, 3516CV200+Sony323
Sensor	1/3" 1.0M Pixels Progressive CMOS Image Sensor	1/3" 2.0M Pixels Progressive CMOS Image Sensor
Output resolution	1280(H)×720(V)	1920(H)×1080(V)
D/N Mode	Auto switching,black and white vide and IR cut action linkage	
Illumination	Color 1.0Lux@F1.2,Black 0.1 Lux@F1.2	
Video processing	H.264 video compression, dual streaming AVI format, 0.1M~6Mbps adjustable;	
Video Output	Main streaming: 1280×720,1024×768,1280×720; Sub streaming: 960×540,640×360,480×270,352×288,320×240,352×192, 320×192,288×192,256×192	Main streaming: 1920×1080, 1280×960,1280×720,1024×768, 1280×720; Sub streaming: 960×540,640×360,480×270,352×288,320×240,352×192,320×192,288×192,256×192
Frame rate	1.0MP 25/30 frame(full real time),support 1~30frame/seconds adjustable	2.0MP 25/30 frame(full real time),support 1~30frame/seconds adjustable
Network interface	RJ45 ethernet,10/100M;RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP protocol supported	
Access Protocol	Standard ONVIF Protocol, Support third party access; PC; Support IE6.0 and aboveSmartphone Support Android/iPhone	
Lens		
Lens	3.6mm lens/3.7mm pinhole or screw lens/1.56mm panoramic lens	
Function		
Function	Support WEB configuration, OSD,real-time video transmission	
Function	Support motion detection	
Function	Support front end storage ,playback and download	
Function	Support uniform client and platform system application	
Function	Support complete SDK for second development.	
Function	Support Wifi connection, meet with IEEE 802.11b/g wireless standard	
Function	Support SD Slot, max 64GB SD Card	
Normal		
Power supply	DC12V1A/POE(optional)	
Operation temperature	-10°C~+60°C,10%~90%RH	