


**H.265 4.0/5.0MP CCTV Video Surveillance IR Bullet IP HD Camera**



**Features**

- \* Hisilicon high-performance DSP
- \* High quality progressive scanning CMOS
- \* H.265/H.264 High profile
- \* Support dual stream, support mobile phone
- \* Support power supply DC12V/POE
- \* Standard ONVIF Protocol, support multi network protocols
- \* Metal case, Waterproof IP66

**Dimension**

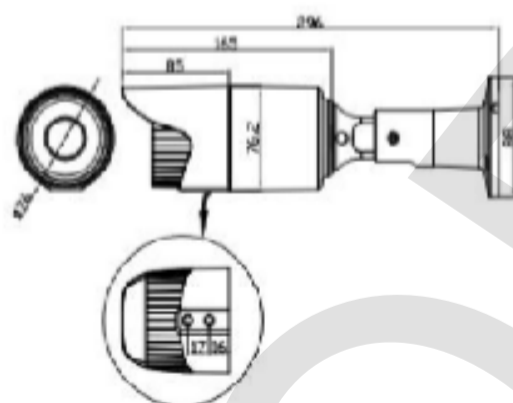

**Accessories**

- User Manual
- CD
- Screw fittings

Specification		
Product Name	<b>H.265 4.0/5.0MP CCTV Video Surveillance IR Bullet IP HD Camera</b>	
Model No.	WDM-HIP9400DH	
Video		
System	Hi3516EV300+Sony IMX335	
Sensor	1/2.8" 4.0/5.0M Pixels Progressive CMOS Image Sensor	
Output resolution	5.0MP(2592x1944), 4.0MP(2592x1520)	
D/N Mode	Auto switching,black and white video and IR cut action linkage	
Illumination	0.001Lux@F1.2 (Color), 0Lux@F1.2(B/W)	
SNR	≥50db(AGC OFF)	
Gain Control	Auto	
DNR	2D, 3DNR	
WDR	DWDR	
Video processing	H.265/H.264 video compression, dual streaming AVI format, 0.5M~8Mbps adjustable;	
Video Output	Main streaming	2592*1944,2592*1520,2560*1440,2048*1520,2304*1296,1920*1080
	Sub streaming	800*448,720*480,640*480,640*360,480*360,352*288
Frame rate	2592*1944@15fps, 2592*1520@25fps	
Network interface	RJ45 ethernet,10/100M;RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP protocol supported	
Access Protocol		Standard ONVIF Protocol, Support third party access; PC;
		Support IE6.0 and above Smartphone
		Support Android\iPhone
Lens		
Lens	Standard 4mm lens(6mm lens or 2.7-13.5mm manual/auto lens for optional)	
View Angle	4mm lens(6MP F2.0 1/2.8" H 80.7°); 6mm lens(6MP F2.0 1/2.8" H 52.7°); 2.7-13.5mm Auto Lens(6MP F1.3 1/2.8" H 108.8°-28.8°); 2.7-13.5mm Manual Lens(6MP F1.8 1/2.8" H 113.9°-27.7°)	
IR distance	30-40m(42pcs F5 IR leds)	
Function		
Function		Support WEB configuration, OSD,real-time video transmission
		Support motion detection
		Support front end storage ,playback and download
		Support uniform client and platform system application
		Support complete SDK for second development.
Normal		
Material	Metal Case, White	
Weather Proof	IP66 Waterproof, Weather Resistance	
Power supply	DC12V/POE(24W) optional	
Operation temperature	-20°C~+60°C, 10%~90%RH	