


FEG-A-5D | RoHS CE

For Small Scissors Lift

SUCVARY



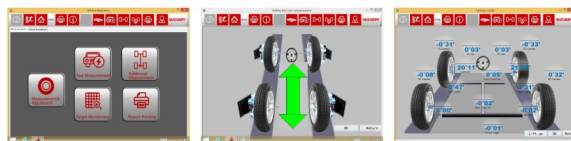






Limited Space Unlimited Splendidness



FEG-A-5C













Products Advantages

-  Without limitation of space. It works on all lifting machines;
-  With 5 cameras, the reference plane is car body, so it can measure almost all kinds of vehicles, even if the vehicle is lifted;
-  It supports varied operation platforms, point to point transmission by WiFi can shield interference;
-  Supported by powerful cloud service, it can connect to IPAD, cell phone, computer and the Internet, supporting remote shunting operation and data upgrade.
-  Four targets are crash resistant and can be exchanged. Fix wheel claws without taking apart wheel hub cover;
-  Measurement range is wide, and it can also test wheel deviation besides all traditional parameters.
-  The optional one point wheel clamps can be installed within four seconds.

Measurement Range And Accuracy

References	Accuracy	Measurement Range
Camber	±0.01°	±8°
Caster	±0.03°	±19°
Front Wheel K.P.I	±0.02°	±19°
Toe	±0.01°	±2°
Rear Wheel Thrust Angle	±0.02°	±2°
Rear Axle Deviation	±0.02°	±2°
Track width Difference	±0.02°	±2°
Front Setback	±0.02°	±2°
Rear Setback	±0.02°	±2°
Track Width	±0.64cm	<265cm
Wheelbase	±0.64cm	<533cm

Configuration List

													Packaging Size/ Weight
SY5D-618B	★	★	★	★	★	★	★	★	★	★	★	Optional	92.5*54.5*60cm/65kg
SY5D-618B+	★	★	★	★	★	★	★	★	★	★	★	Optional	92.5*54.5*60cm 76*73*135cm/148kg

Wheel Aligner
For Small-Scissors Lift
FEG-A-5C/5D