

## HW Anti-slide Grain Heat Shrinkable Sleeve For Fishing Rod

### Description



HW anti-slide pattern heat shrink sleeve is made of radiation cross-linked polyolefin material, bright color, non-fade forever, good shrinkable properties, have two kinds of grain, cross grain and frosted grain.

It's widely used in fishing gear, fish rod, machine grip, sport equipment handle, etc.

### Feature & benefit

- 1, Anti-slide, good shrinkable performance, shrink ratio: 2:1
- 2, Soft touch feeling, easy to use
- 3, anti-static, withstand 600V
- 4, Accord with RoHs compliant

### Operating indexes:

- 1, First shrink Temp.: 70°C
- 2, Final Shrink Temp.: 110°C
- 3, Working temp.: -55°C~105°C




**Up to standard:** Approvals

Meet UL, VW-1

## Technical Date

Technical Data		
Item	Properties	Performance
1	Tensile strength	≥0.8MPa
2	Longitudinal shrinkage	≤±8%
3	shrinkable temperature	≤110℃
4	Dielectric strength	≥10Kv/mm

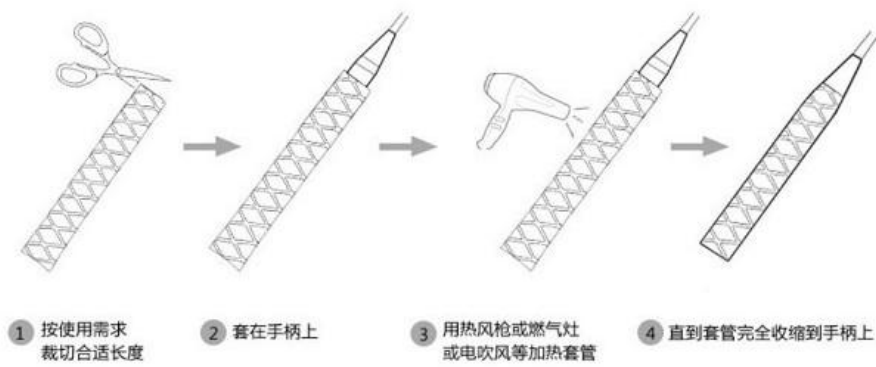

## Dimension

Model: HW-X: Cross grain      HW-N: Frosted grain

Size(mm) Diameter	As supplied (mm)		As recovered (mm)		Packing standard
	Inner diameter	wall thickness	Inner diameter	wall thickness	
15	16.1±0.2	0.45±0.05	≤7.5	0.80±0.15	1m/piece, 200PCS/CTN 1.6m/piece, 160PCS/CTN
18	19.1±0.2	0.45±0.05	≤9.0	0.80±0.15	1m/piece , 200PCS/CTN 1.6m/piece, 160PCS/CTN

20	21.1±0.2	0.45±0.05	≤10	0.90±0.15	1m/piece, 200PCS/CTN 1.6m/piece, 160PCS/CTN
20T (Increased inner diameter)	22.1±0.2m	0.45±0.05	≤10	0.90±0.15	1m/piece, 200PCS/CTN 1.6m/piece, 160PCS/CTN
22	23.1±0.2	0.50±0.05	≤12.5	0.90±0.15	1m/piece, 200PCS/CTN 1.6m/piece, 160PCS/CTN
25	26.1±0.2	0.50±0.05	≤14.5	1.00±0.15	1m/piece, 200PCS/CTN 1.6m/piece, 160PCS/CTN
25T (Increased inner diameter)	27.1±0.2	0.50±0.05	≤14.5	1.00±0.15	1m/piece, 200PCS/CTN 1.6m/piece, 160PCS/CTN
28	29.1±0.2	0.50±0.05	≤15.5	1.00±0.15	1m/piece, 200PCS/CTN 1.6m/piece, 160PCS/CTN
30	31.1±0.2	0.55±0.05	≤17.5	1.05±0.15	1m/piece, 200PCS/CTN 1.6m/piece, 160PCS/CTN
35	36.1±0.2	0.55±0.05	≤20	1.10±0.15	1m/piece, 200PCS/CTN 1.6m/piece, 160PCS/CTN
40	41.1±0.2	0.55±0.05	≤23	1.20±0.15	1m/piece, 200PCS/CTN 1.6m/piece, 160PCS/CTN
50	51.1±0.2	0.55±0.05	≤27.5	1.30±0.15	1m/piece, 200PCS/CTN 1.6m/piece, 160PCS/CTN

Apply to the covered ( outer diameter is between 13mm and 24mm)

Colors:Regular Black, yellow, red, green, blue.

