


DKE Velcro Fireproof Silicone Coated Glassfiber Slewing

Description

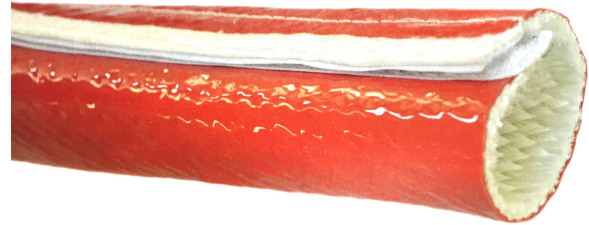

DKF Electric Insulation Silicone Coated Fiberglass Cable Sleeve

DKF Silicone fiber glass cable sleeve With Hook and Loop Fastener is made by fire-resisting sleeve seamed with nylon flame resisting fastening.

Hook and Loop Fastener design make the fire proof sleeve easy to install and tear down. Its flexible and simple structure make it easy to apply to pipeline instruction. Especially used in installed pipeline equipment for high temperature protection.

Feature & benefit

- 1, Fire proof, flame retardant, heat insulation.
- 2, Heat prevention, insulation , anti-aging
- 3, Withstand melting metal splash
- 4, Withstand strong heat source and flame.
- 5, Anti-acid and anti-alkali

Product application

- 1, widely used in steelworks, smelting plant, glassworks, rail transit, and other high temperature environment.
- 2, Applied to hydraulic hose, cable, metal hose, corrugated tubing and all kinds of pipeline for high temperature protection.

Product characters

Inner diameter	10mm-115mm
Color	Red, black, other colors can be made according to customer's need, nylon fastening optional color: white or black
Work temperature	Can use continuously at - 75 ° C to 260 ° C, short moment resistance can be up to 1650 ° C
Nominal voltage	7kv--25 kv.
Product properties	Fire prevention, flame retardant, heat insulation, insulation, anti-aging, prevent splashing liquid steel and waterproof, prevent oil, acid and alkali resistance

Standard Size:

PART NO.	INNER DIA.		Single WALL THICK (mm)	LENGTH (M/Roll)
	mm	inch		
DKF-10	10	3/8	2.1	20
DKF-15	15	5/8	2.4	20
DKF-20	20	3/4	2.6	20
DKF-25	25	1	2.9	20
DKF-30	30	1 1/8	3.1	20
DKF-35	35	1 3/8	3.4	20
DKF-40	40	1 5/8	3.4	20
DKF-45	45	1 3/4	3.6	20
DKF-50	50	2	3.7	20
DKF-55	55	2 1/6	3.8	15
DKF-60	60	2 3/8	4.0	15
DKF-65	65	2 1/2	4.1	15
DKF-70	70	2 3/4	4.3	15
DKF-75	75	3	4.3	15

DKF-80	80	3 1/8	4.5	15
DKF-85	85	3 3/8	4.5	15
DKF-90	90	3 1/2	4.6	15
DKF-95	95	3 3/4	4.6	15
DKF-100	100	4	4.7	10
DKF-105	105	4 1/8	4.7	10
DKF-110	110	4 3/8	4.8	10
DKF-115	115	4 1/2	4.8	10