


Shenzhen Fu Sheng Electric Co.,Ltd.
No.1,Block3,Hongchang,Shunchang Street,Pinghu,Longgang District,Shenzhen China
Tel:0755-8466-0060 Mobile:+86 13662256009

FS1238 Size:120*120*38mm DC Axial Fan

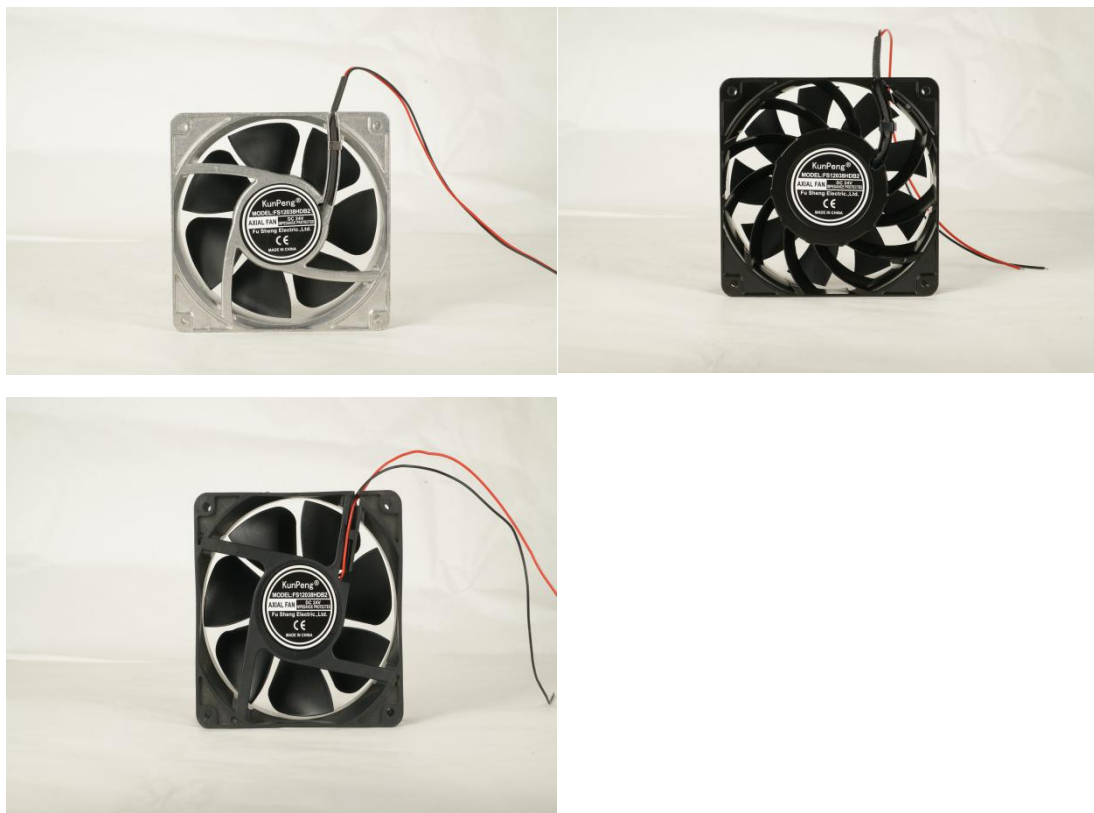

Frame:Thermal Plastic,UL 94V-0/Aluminum Alloy

Impeller:Thermal Plastic,UL 94V-0

Lead Wire:AWG#24 UL1007(Optional)

(+):Red(-):Black

Insulation Resistance:

Above 10M Between Lead wire and Frame DC500V

Specification:

No.1,Block3,Hongchang,Shunchang Street,Pinghu,Longgang District,Shenzhen China

Shenzhen Fu Sheng Electric Co.,Ltd.
No.1,Block3,Hongchang,Shunchang Street,Pinghu,Longgang District,Shenzhen China
Tel:0755-8466-0060 Mobile:+86 13662256009

Model	Bearing	Rated voltage (v)	Rated current (A)	Rated Input power(W)	Nominal speed (RPM)	Air flow (CFM)/(m ³ /min)		Air pressure		Noise (dB)	Weight(g)
FS12038 HDA12B(S)	sleeve/ball	12	0.40	4.80	3000	125.32	5.50	9.85	0.38	46.0	270
FS12038 MDA12B(S)	sleeve/ball	12	0.38	4.58	2700	105.94	3.00	7.60	0.30	41.0	
FS12038L DA12B(S)	sleeve/ball	12	0.23	2.76	2400	84.76	2.40	4.56	0.18	34.0	
FS12038 HDA24B(S)	sleeve/ball	24	0.35	8.40	3000	125.32	5.50	9.85	0.38	46.0	
FS12038 MDA24B(S)	sleeve/ball	24	0.28	6.72	2700	105.94	3.00	7.60	0.30	41.0	
FS12038L DA24B(S)	sleeve/ball	24	0.20	4.80	2400	84.76	2.40	4.56	0.18	34.0	
FS12038 HDA48B(S)	sleeve/ball	48	0.20	9.60	3000	125.32	5.50	9.85	0.38	46.0	
FS12038 MDA48B(S)	sleeve/ball	48	0.11	5.12	2700	105.94	3.00	7.60	0.30	41.0	
FS12038L DA48B(S)	sleeve/ball	48	0.06	2.88	2400	84.76	2.40	4.56	0.18	34.0	
FS12038 HDA48B-P	sleeve/ball	48	0.78	37.44	4800	200.28	5.671	25.92	1.020	67.0	393
FS12038 MDA48B-P	sleeve/ball	48	0.91	43.68	5300	223.28	6.321	31.51	1.241	68.0	
FS12038L DA48B-P	sleeve/ball	48	1.28	61.44	5800	245.83	6.961	38.16	1.502	71.0	