


FS7530 Size:75*75*30mm DC Blower Fan

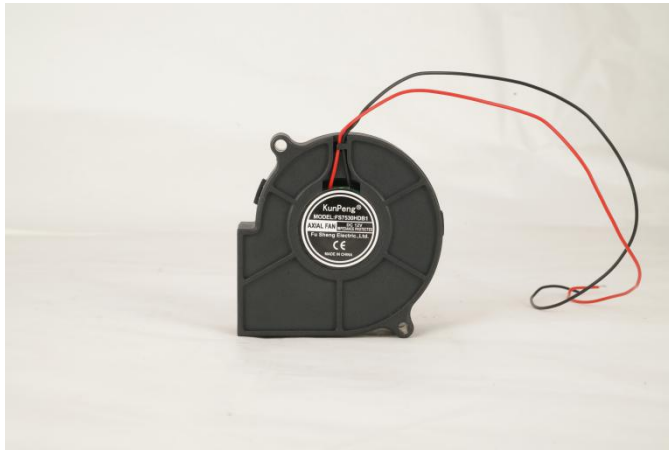

Frame:Thermal Plastic,UL 94V-0
 Impeller:Thermal Plastic,UL 94V-0
 Lead Wire:AWG#24 UL1007(Optional)
 (+):Red(-):Black
 Insulation Resistance:
 Above 10M Between Lead wire and Frame DC500V

Model	Bearing	Rated voltage(v)	Rated current (A)	Rated Input power(W)	Nominal speed (RPM)	Air flow	Air pressure	Noise (dB)	Weight(g)
FS7530HD B12B (S)	sleeve/ball	12	0.45	5.40	3500	12.55	10.03	42.00	85
FS7530HD B12B (S)	sleeve/ball	12	0.28	3.38	3000	11.23	9.05	38.00	
FS7530HD B12B (S)	sleeve/ball	12	0.20	2.40	2500	9.18	7.55	33.00	
FS7530HD B24B (S)	sleeve/ball	24	0.25	8.00	3500	12.55	10.03	42.00	
FS7530HD B24B (S)	sleeve/ball	24	0.20	4.80	3000	11.23	9.05	38.00	
FS7530HD B24B (S)	sleeve/ball	24	0.13	3.12	2500	9.18	7.55	33.00	