

SPECIFICATION

Current Rating:	3.0 Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PA6T,UL 94V-0 Black

Ordering Code:

FHEU10 - $\frac{X}{(1)} - \frac{X}{(2)} - \frac{D}{(3)} - \frac{X}{(4)} - \frac{X}{(5)} - \frac{X}{(6)} - \frac{X}{(7)} - \frac{X}{(8)}$

① Series No:

② No. of Contacts
02 To 80

③ Contact Plating:

G0:Gold flash	S0:Selective
G1:3U" Gold	S1:Selective 3u" (
G2:5u" Gold	S2:Selective 5u"
G3:10u "Gold	S3:Selective 10u"
G4:15u" Gold	S4:Selective 15u"
G5:30u" Gold	S5:Selective 30u"
SN:Tin	

④ Connector Type
D: Dual

⑤ Plastic High:
H:7.1

Please mark the
desired length in the H

⑥ Insulator Material

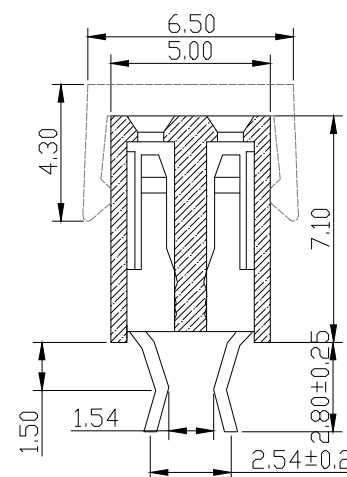
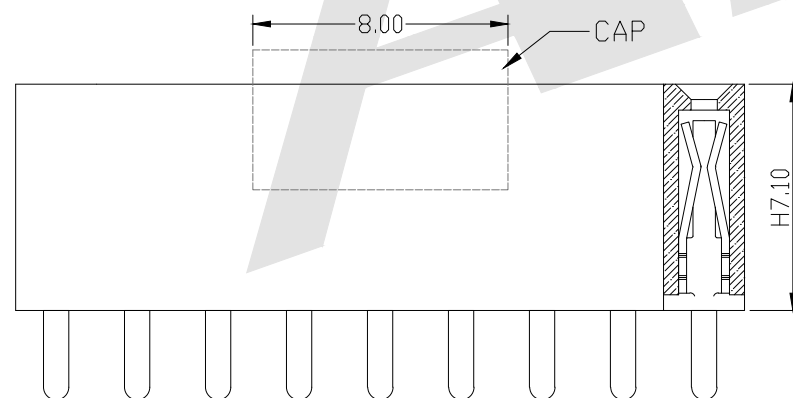
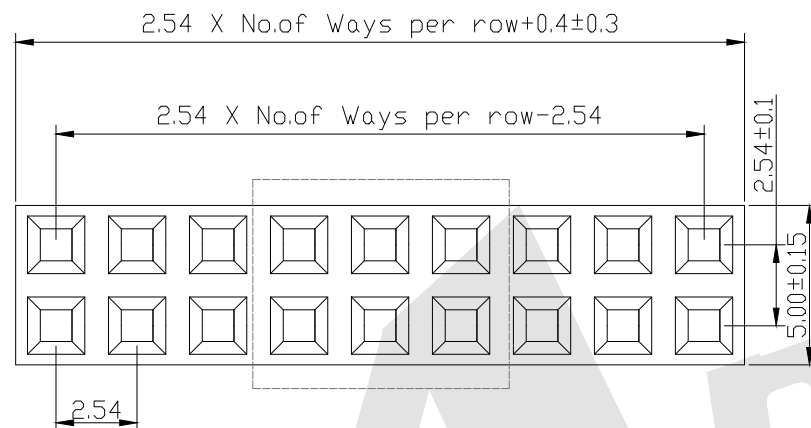
A:PBT
B:PA6T
C:LCP
D:PA46
E:PA9T

u" ⑦ Packing

A:Tray
B:Bag
T:Tube


U:Tube+CAP
R:Tape&Reel

⑧ With locating pegs option
A: Type A without pegs
B: Type B with pegs

 0.80×0.25

Unless Otherwise specified tolerance	
X. ± 0.35	X.XX: ± 0.20
X.X: ± 0.25	X.XXX: ± 0.15

SCALE: As Shown	UNIT: mm
DRAW Wu Feng Rong	DATE 04/09/2019
CHECK BobYang	DATE 04/09/2019




 ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE:

2.54mm Female Header Dual Row Splint Type

DRAWING NO:	FHEU10-XXDXXXX
-------------	----------------

PRODUCT NO:	FHEU10-XXDXXXX
-------------	----------------

REV	DESCRIPTION	DATE