

HSF





SPECIFICATION

Current Rating: 7 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65 °C to +125 °C
 Contact Material: Brass
 Insulator Material: LCP,UL 94V-0 Black



Ordering Code:

PHHS01 - X - X - S - A/B - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No.of Contacts
02 To 40
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3u" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin
- ④ Connector Type
S:Single
- ⑤ Pin Length:
 A:1150=11.50mm
 B:0320=3.20mm
 Please mark the desired length in the A/B
- ⑥ Insulator Material
 B:PA6T
 C:LCP
 E:PA9T
- ⑦ Packing:
 A:Tray
 B:Bag
 T:Tube
 U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP

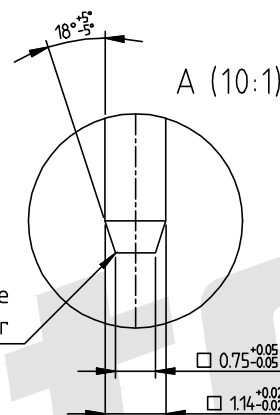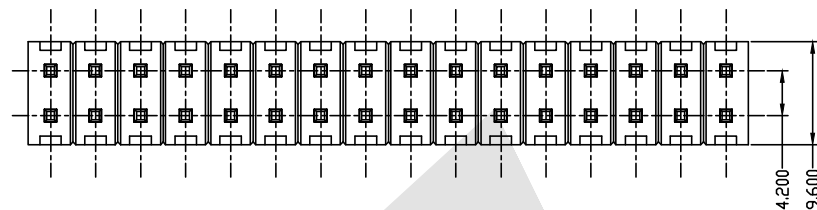

Senza bave
Without burr

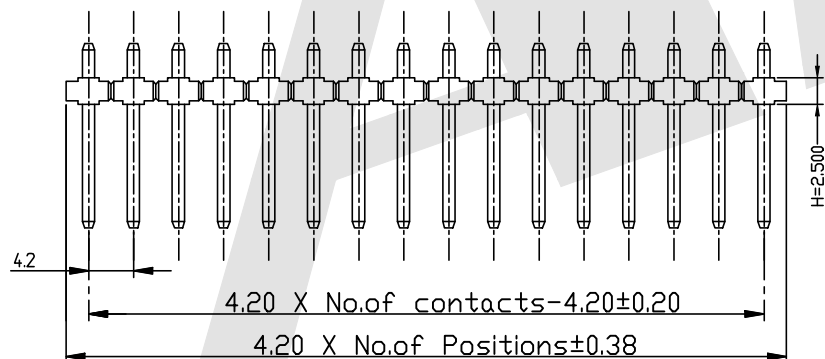

⊥ ∅0.1A

Standard IE P/N :

PHHS01-10-G0-S-1150-0320-C-B

A	B	Unless Otherwise specified tolerance	
11.5	3.2	X. ±0.35	X.XX: ±0.20
		X.X: ±0.25	X.XXX: ±0.15



ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

Optional	SCALE: As Shown	UNIT: mm
	DRAW YG ZHONG	DATE 01/05/2016
	CHECK BobYang	DATE 01/05/2016

TITLE:
4.2 Pin Header DUAL ROW STRAIGHT TYPE

DRAWING NO: PHHS01-XXS-1150-0320-XX
 PRODUCT NO: PHHS01-XXS-1150-0320-XX

Increase packing method and material

2016/10/25



REV DESCRIPTION

DATE