

HSF







SPECIFICATION

Current Rating: 1.5 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PA6T,UL 94V-0 Black

Ordering Code:

PHDR03 - X - X - S - A-D1-D2-B- - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts: 01 To 40
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3U" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u"Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin
- ④ Connector Type
 S:Single
- ⑤ Pin Length:
 A:0400=4.00mm
 D1:0296=2.96mm
 D2:0290=2.90mm
 B:0280=2.80mm
 Please mark the desired length in the A/D1/D2/B
- ⑥ Insulator Material
 A:PBT
 B:PA6T
 C:LCP
 D:PA46
 E:PA9T
- ⑦ Packing:
 A:Tray
 B:Bag
 T:Tube
 U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP
- ⑧ Plastic High
 H1:1.5mm
 H2:2.0mm

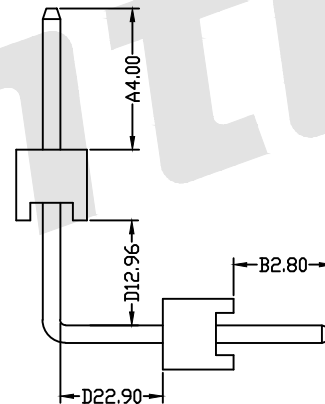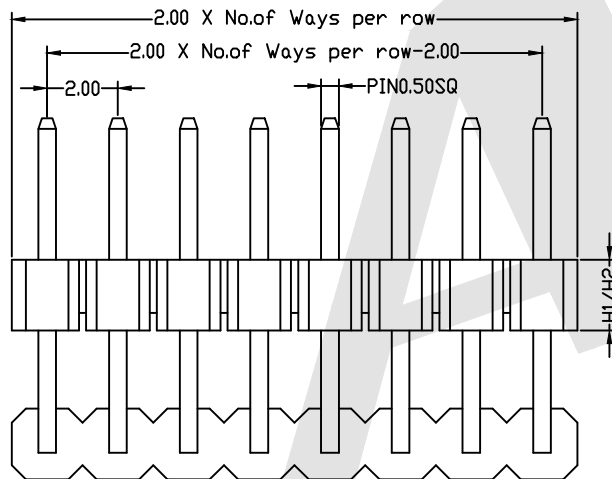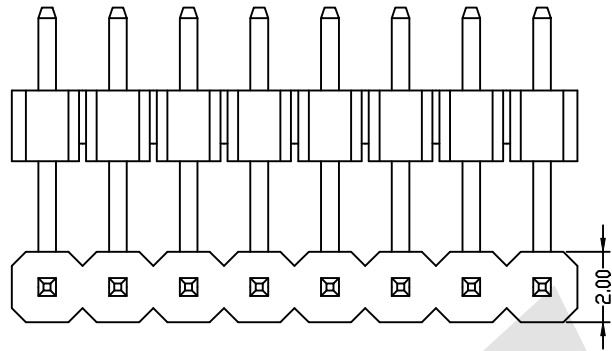

Standard IE P/N :

PHDR03-10-G0-S-0400-0296-0290-0280-B-B-H1

A	D1	D2	B
4.0	2.96	2.90	2.80


Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Antenk ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

Optional		SCALE: As Shown	UNIT: mm
DRAW	YG ZHONG	DATE	03/22/2016
CHECK	BobYang	DATE	03/22/2016

TITLE:
 2.00mm Pin Header SingleRow Double Plastic Angle Type

REV	DESCRIPTION	DATE
	Increase packing method and material	2016/10/25



DRAWING NO: PHDR03-XXS-0400-0296-0290-0280-XXX
 PRODUCT NO: PHDR03-XXS-0400-0296-0290-0280-XXX