
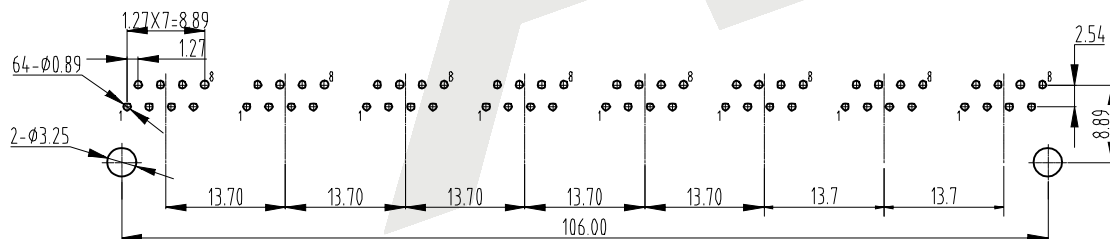
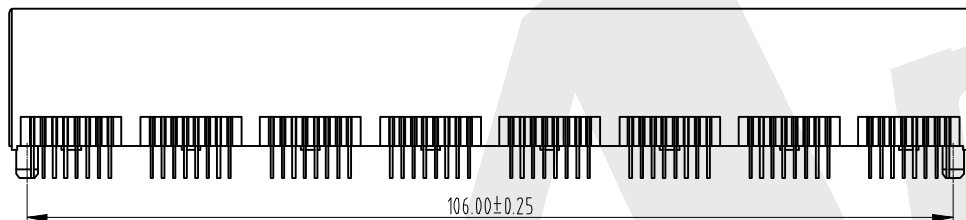



HSF

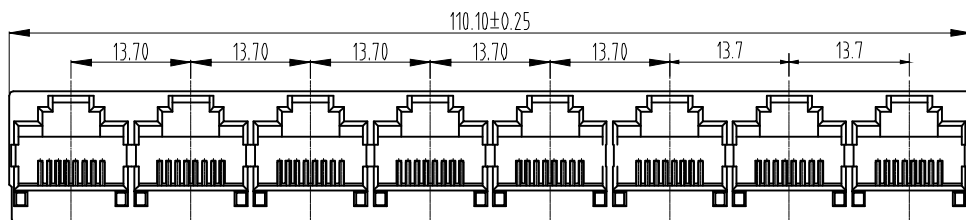

PCB LAYOUT/TOP VIEW

NOTES:

MATERIAL:

- 1. HOUSING MATERIAL :GLASS FILLED POYESTER UL94V-0.
- 2. CONTACT MATERIAL :PHOSPHOR BRONZE t=0.3mm
- 3. PLATING :SELECTING GOLD PLATING 1μ~50μ"OVER NICKEL IN CONTACT AREA. 150μ" TIN PLATIN. OVER NICKEL IN SOLDER AREA
- 4. SHIELD :0.2mmTHICKNESS COPPER WITH NICKEL PLATEI

ELECTRICAL

- 1. VOLTAGE RATING :125VAC RMS
- 2. CURRENT RATING :1.5AMP
- 3. CONTACT RESISTANCE:30 MILLIOHMS MAX
- 4. INSULATION RESISTANCE 500 MEGOHMS MIN @500V DC
- 5. DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN

MECHANICAL

- 1. DURRABILITY :750 CYCLES MIN
- 2. PCB RETENTTON PRB-SOLDER :1 LB MIN

REVRONMENTAL

- 1. STORAGE :-40° C TO 85° C
- 2. OPERATION :0° C TO 70° C

Order code:


ATRJ5222 - 8P - 8C - X - A - F

① ② ③ ④ ⑤ ⑥

- ① SERIES NO:
- ② NUMBER OF POSITIONS (8P, 6P, 4P)
- ③ NUMBER OF CONTACTS (8C, 6C, 4C)
- ④ Contact PIating  
G0:G0ld flash  
G1: 3U" Gold  
G2: 5U" Gold  
G3:10U" Gold  
G4:15U" Gold  
G5:30U" Gold  
SN:Tin
- ⑤ Shield  
A:W/0 Shield  
B:Half Shield  
C:Shield W/Eml  
D:Shield W/0 Eml
- ⑥ Ports  
A:1X1P  
B:1X2P  
C:1X4P  
D:1X5P  
E:1X6P  
F:1X8P

Unless Otherwise specified tolerance  
X. ±0.35 X.XX:±0.20  
X.X:±0.25 X.XXX:±0.15

SCALE: As Shown UNIT: mm  
DRAW Wu Sai DATE 25/07/2019  
CHECK BobYang DATE 25/07/2019



**Antenk**® ANTENK ELECTRONICS CO.,LTD  
Http://www.antenk.com  
E-mail:sales@antenk.com

TITLE: Modular Jack Top entry,  
8P8C, 1X8Port Full Plastic

DRAWING NO: ATRJ5222-8P8C-X-A-F

PRODUCT NO: ATRJ5222-8P8C-X-A-F

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		