

HSF







### SPECIFICATION

Current Rating: 1.5 Amp  
 Insulation Resistance: 1000M ohms min  
 Contact Resistance: 20M ohms max  
 Dielectric Withstanding: AC500V  
 Operating Temperature: -65°C to +125°C  
 Contact Material: Brass  
 Insulator Material: PA6T,UL 94V-0 Black

Ordering Code:  
 PHDR11 - X - X - F - A - D - B - X - X  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts  
04 To 160
- ③ Contact Plating:  
G0:Gold flash S0:Selective  
G1:3U" Gold S1:Selective 3u"  
G2:5u" Gold S2:Selective 5u"  
G3:10u" Gold S3:Selective 10u"  
G4:15u" Gold S4:Selective 15u"  
G5:30u" Gold S5:Selective 30u"  
SN: Tin
- ④ Connector Type  
F: Four
- ⑤ Pin Length:  
A:0400=4.00mm  
D:0075=0.75mm  
B:0280=2.80mm  
Please mark the desired length in the A/D/B
- ⑥ Insulator Material  
A:PBT  
B:PA6T  
C:LCP  
D:PA46  
E:PA9T
- ⑦ Packing:  
A:Tray  
B:Bag  
T:Tube  
U:Tube+CAP  
R:Tape&Reel  
W:Tape&Reel+CAP

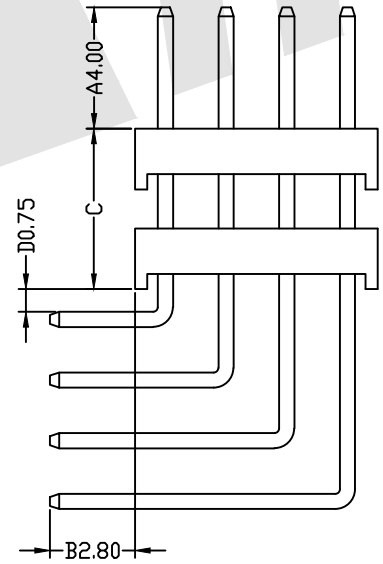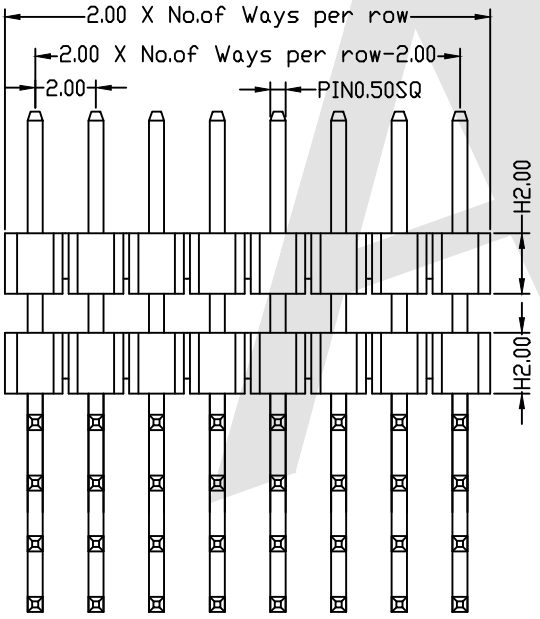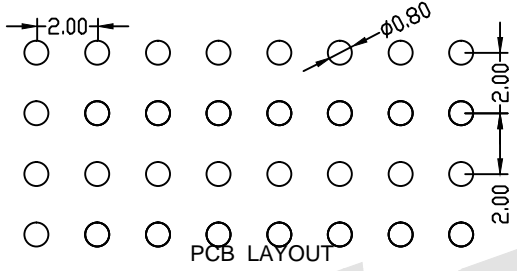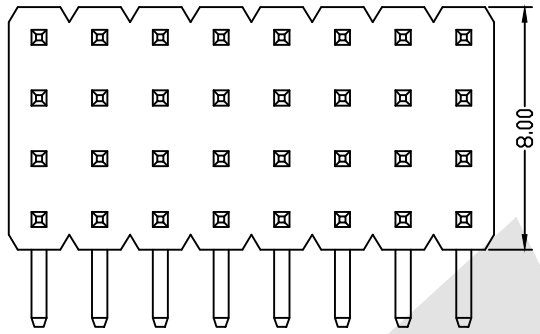

Standard IE P/N : PHDR11-10-G0-F-0400-0075-0280-B-B

A	D	B	Unless Otherwise specified tolerance	
4.00	0.75	2.80	X. ±0.35	X.XX: ±0.20
			X.X: ±0.25	X.XXX: ±0.15
Optional		As Shown	UNIT: mm	


**Antenk** ANTENK ELECTRONICS CO.,LTD  
 Http://www.antenk.com  
 E-mail:sales@antenk.com

DRAW	YG ZHONG	DATE	01/05/2016
CHECK	BobYang	DATE	01/05/2016

TITLE:  
2.00mm Pin Header Four Row Double Plastic Angle Type

2016/10/25  
DATE

DRAWING NO: PHDR11-XXF-0400-0075-0280-XX  
 PRODUCT NO: PHDR11-XXF-0400-0075-0280-XX



REV	Increase packing method and material			2016/10/25
	DESCRIPTION			DATE