

HSF



RoHS





SPECIFICATIONS:

Current Rating: 1Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65° C to +125° C
 Contact Material: Brass
 Insulator Material: PA6T, UL94V-0, Black

Ordering Code:

PHCR03 - X - X - S - A-D-B - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts:
01 To 50
- ③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
- ④ Connector Type:
S:Single row
- ⑤ Pin Length:
A: 0300=3.00mm
D: 0100=1.00mm
B: 0180=1.80mm
Please mark the desired length in the A/D/B
- ⑥ Insulator Material:
B:PA6T
C:LCP
E:PA9T
- ⑦ Packing:
A:Tray B:Bag
T:Tube U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP
- ⑧ Plastic High:
H1:1.7mm
H2:2.5mm

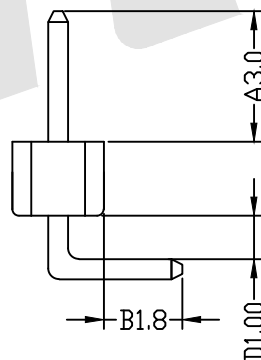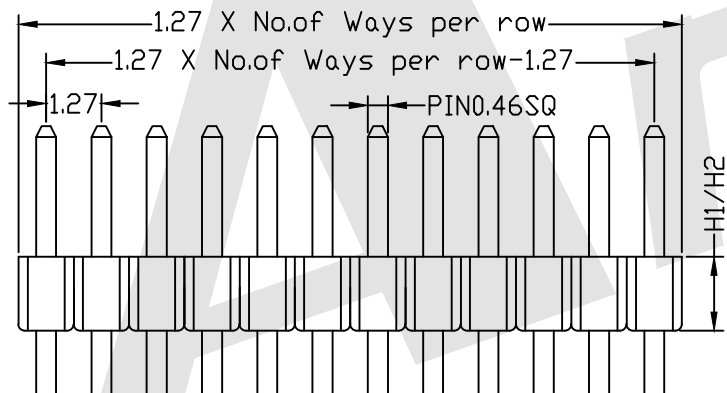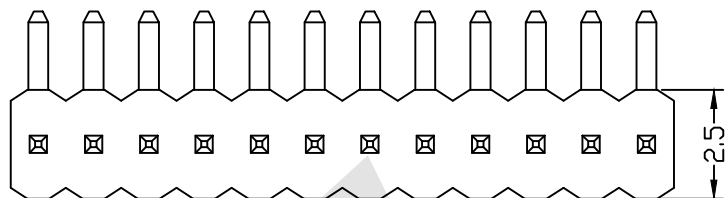

PCB LAYOUT

Standard IE P/N : PHCR03-10 - G0 - S - 0300-0100-0180 - B - B - H2

A	D	B	Unless Otherwise specified tolerance	
3.0	1.0	1.8	X. ±0.35	X.XX: ±0.20
			X.X: ±0.25	X.XXX: ±0.15
Optional			SCALE: As Shown	UNIT: mm

Antenk® ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

DRAW	DATE
YG ZHONG	12/11/2015
CHECK	DATE
BobYang	12/11/2015

TITLE: 1.27mm Pin Header Single Row Angle Type

2016/10/25

DRAWING NO: PHCR03-XXS-0300-0100-0180-XXX
 PRODUCT NO: PHCR03-XXS-0300-0100-0180-XXX

REV	DESCRIPTION	DATE
	Increase packing method and material	2016/10/25

