



HSF

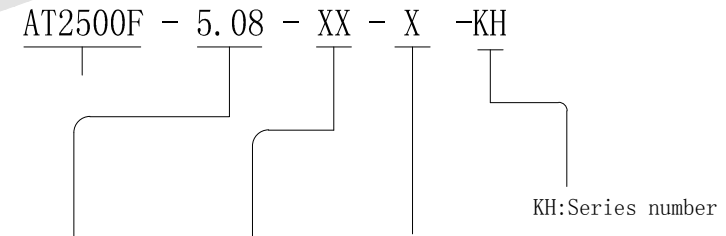

SPECIFICATION:

Voltage Rating:300V
 Current Rating:10A
 Wire range:28-12AWG 2.5mm²
 Dielectric Withstanding Voltage:AC2500V/1Min
 Housing:PA66+23%GF, UL94V-0
 Terminal:Brass, Nickel Plated Or Steel, Zn-Plated
 Wire Cage:Phosphor Copper, Nickel Plated
 Screw:Steel, M2.5 Zn-Plated
 Torque:0.4N.m
 Operating Temperature Range:-40° C To +105° C

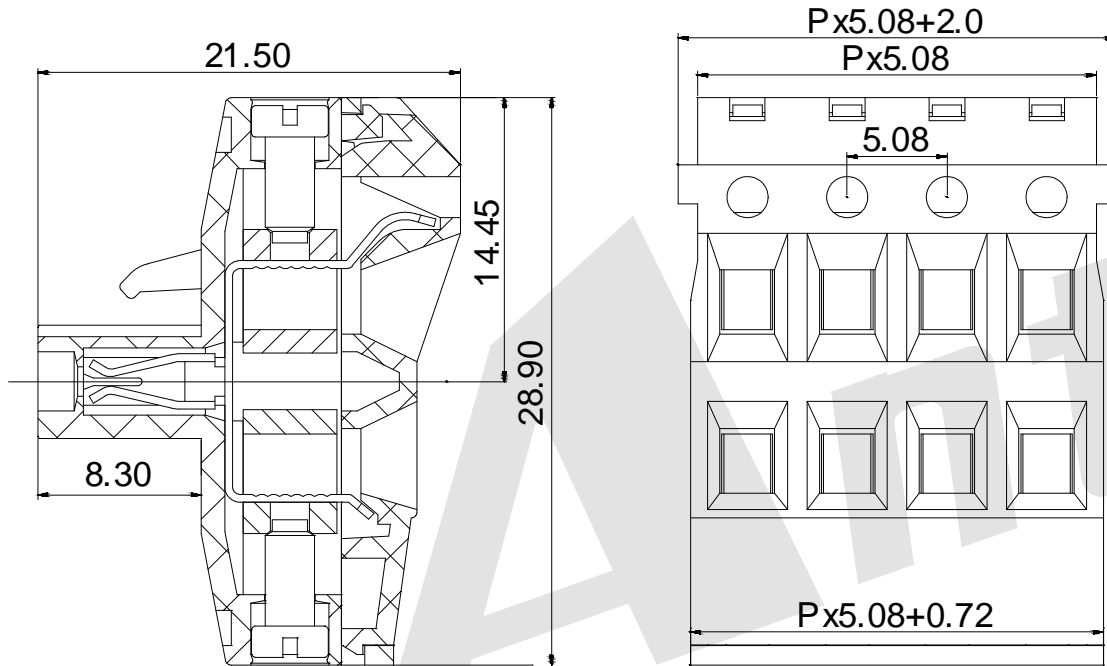


Pitch: 5.08:5.08mm
 Poles: 02: 2 Contacts, 03: 3 Contacts, ...: ..., 24: 24 Contacts
 Insulator color: A:Green, B:Blue, C:Black, G:Gray, O:Orange

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Antenk® ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

| | |
|----------------------|--------------------|
| SCALE: As Shown | UNIT: mm |
| DRAW Wu Feng Rong | DATE 29/02/2020 |
| CHECK BobYang | DATE 05/18/2015 |

TITLE:
 Plug-in Terminal Block Pitch:5.08



DRAWING NO: A2500F-5.08-XXX-KH
 PRODUCT NO: A2500F-5.08-XXX-KH

| REV | DESCRIPTION | DATE |
|-----|-------------|------|
| 1 | | |
| 2 | | |
| 3 | | |
| 4 | | |
| 5 | | |