


Dimension 1 & Ordering Information

	NO. of Poles/positions	A	B	Type
A1	6	7.62	5.08	Without Bar
A2	8	10.16	7.62	
A3	10	12.70	10.16	
A4	14	17.78	15.24	
A5	16	20.32	17.78	
A6	18	22.86	20.32	
A7	20	25.40	22.86	With Bar
A8	24	30.48	27.94	
A9	28	35.56	33.02	
A10	32	40.64	38.10	
A11	40	50.80	48.26	
A12	48	60.96	58.42	

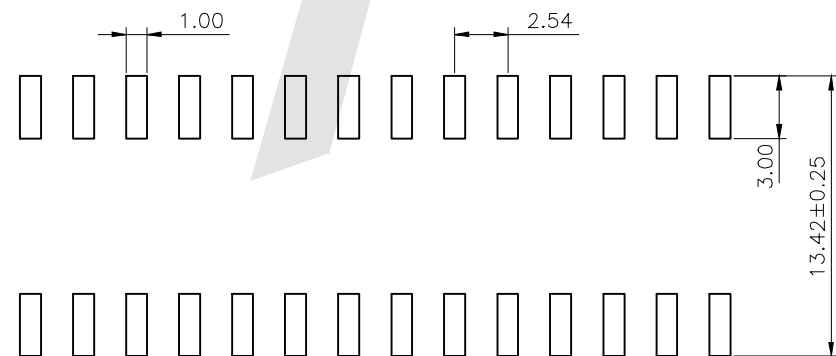

PCB LAYOUT

TECHNICAL DATA

Material:

Pin: brass, machined CuZn38pb2

Plating:

Tin plated : 2um/80u"Ni, 5um/200u"Sn

Gold plated: 2um/80u:nickelfull gold

Insulator black(housing): PPS(UL94V-0)

Electrical:

Current rating: 3Amps/contact max

Contact resistance: ≤4mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V

Operaing voltage : 60VAC/DC

MECHANICAL:

Operaing temperatures: gold plated : -55°C ~ +105°C

Tin plated: -40°C ~ +105°C

Soldering temperature: +260°C , 10s max

Ordering Code:

MIMEM02B - X - X - X
 ① ② ③ ④

① Series No:

② Type selection

A1 A2 A3

A4...

③ Pin Plating

S1: Tin 150"

S2: Tin 200"

G0: Gold flash

G1: 3u" Gold

G2: 5u" Gold

G3: 10u" Gold

G4: 15u" Gold

G5: 30u" Gold

④ Packing

A: Tray


B: Bag

C: Tube

D: Tape & Reel

Unless Otherwise specified tolerance
 X.±0.35 X.XX:±0.20
 X.X:±0.25 X.XXX:±0.15

SCALE: As Shown UNIT: mm
 DRAW Mo Guo Xuan DATE 10/12/2018
 CHECK BobYang DATE 10/12/2018



Antenk ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE: 2.54mm Pitch IC Sockets adapter SMT spacing 7.62mm

DRAWING NO: MIMEM02B-XXX

PRODUCT NO: MIMEM02B-XXX

2	Change of order number	18-10-15
REV	DESCRIPTION	DATE