HSF Pb RoHS

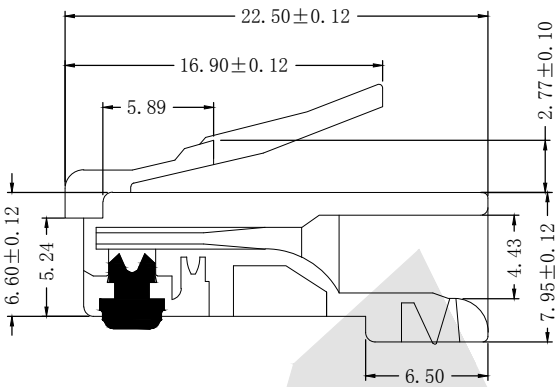

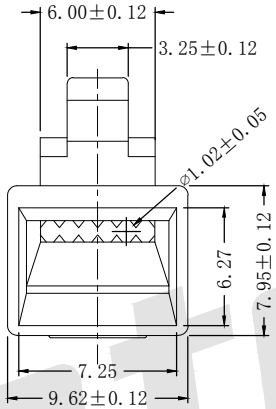

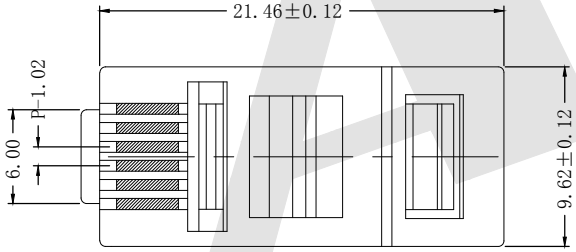

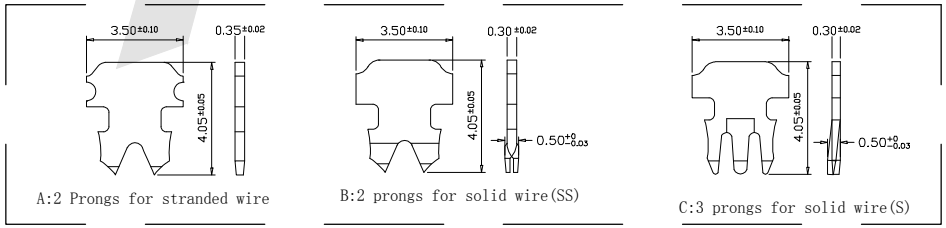

FEATURES:

1 Electrical Test:

A.250V AC max at 2 amps.

B.Dielectric with standing 500volts AC.

C.Insulation Resistance: 500 megaohms.

D.Termination Resistance: 35megaohms.

2 Mechanical:

A.Cable-to-Plug tensile strength-20LBs(89N)min.

B.Durability: 500 mating cycles.

Ordering Code:

ATRP6P6C - X - A - X - 003

① ② ③ ④ ⑤

1. Series:
2. Housing Material:
   - A:UL 94V-0
   - B:UL 94V-2
3. Contact Type:
   - A:2 Prongs for stranded wire
   - B:2 prongs for solid wire(SS)
   - C:3 prongs for solid wire(S)
4. Gold plating :
   - A:1u″ B:3u″
   - C:6u″ D:15u″
   - E:30u″ F:50u″
5. Serial number:

REV	DESCRIPTION	DATE

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown	UNIT: mm
DRAW Wu Feng Rong	DATE 16/09/2019
CHECK BobYang	DATE 16/09/2019

3rd ANGLE PROJECTION

ANTENK ELECTRONICS CO,.LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: Plug 6P6C Serial unshielded Type(LONG BODY)

DRAWING NO: ATRP6P6C-XAX-003

PRODUCT NO: ATRP6P6C-XAX-003