

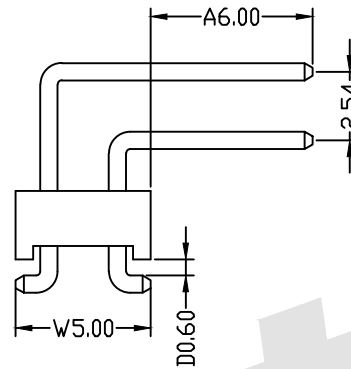
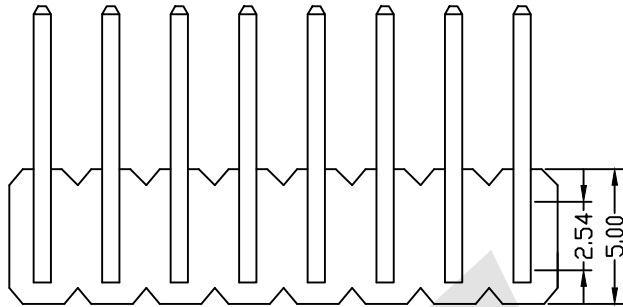



HSF

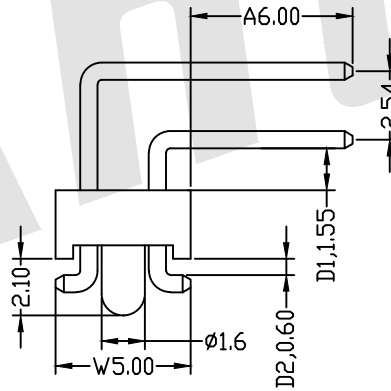

TYPE A

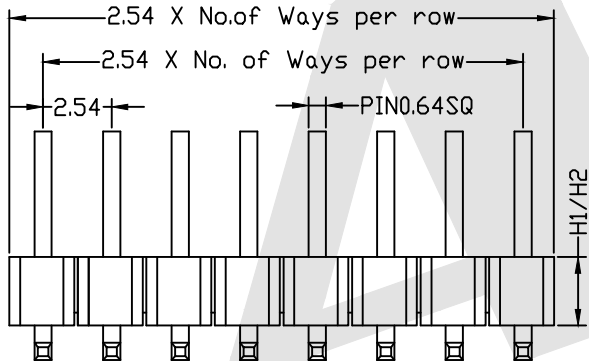

TYPE B

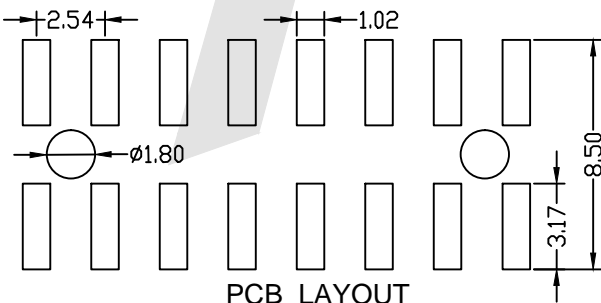

PCB LAYOUT

SPECIFICATION

Current Rating: 3 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PA6T, UL 94V-0 Black

Ordering Code:

PHEM08 - X - X - D - A - D1 - D2 - W - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No:
- ② No. of Contacts
02 To 80
- ③ Contact Plating:
G0: Gold flash S0: Selective
G1: 3u" Gold S1: Selective 3u"
G2: 5u" Gold S2: Selective 5u"
G3: 10u" Gold S3: Selective 10u"
G4: 15u" Gold S4: Selective 15u"
G5: 30u" Gold S5: Selective 30u"
SN: Tin
- ④ Connector Type
D: Dual
- ⑤ Pin Length:
A: 0600=6.00mm
D1: 0155=1.55mm
D2: 0060=0.60mm
W: 0500=5.00mm
Please mark the desired length in the A/D1/D2/W
- ⑥ Insulator Material
A: PBT
B: PA6T
C: LCP
D: PA46
E: PA9T
- ⑦ Packing:
A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP
- ⑧ With locating pegs option
A: Type A without pegs
B: Type B with pegs
- ⑨ Plastic High
H1: 1.70mm
H2: 2.54mm
H3: 2.00mm
H4: 1.50mm

Standard IE P/N : PHEM08-10-G0-D-0600-0155-0060-0500-B-B-A-H1

A	D1	D2	W	Unless Otherwise specified tolerance	
6.0	1.55	0.60	5.00	X. ±0.35	X. XX: ±0.20
				X. X: ±0.25	X. XXX: ±0.15

Antenk ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm

DRAW YG ZHONG DATE 01/05/2016

CHECK BobYang DATE 01/05/2016

TITLE: 2.54mm Pin Header DualRow Straight SMT Type Plane Bending

DRAWING NO: PHEM08-XXD-0600-0155-0060-0500-XXXX

PRODUCT NO: PHEM08-XXD-0600-0155-0060-0500-XXXX



ADD H4=1.5MM

Increase packing method and material

REV DESCRIPTION DATE

1 2 3 4 5 6 7 8