



MATERIALS:

Housing:G.F ,High temp thermoplastic black
Contact:0.20 REF Phosphor bronze
2.Plating:nickel 50 micro min undercoat over all gold flash 4 micro inch min over palladium nickel 40 micro inch min tin in solder tall area
3.parts to be packaged in pvc tubes

Ordering Code:

ABT01 - 03 - L - C - X - D
 ① ② ③ ④ ⑤ ⑥

- ① Series No:
- ② No. of Contacts
03:03Pin
- ③ Insulator Material:
P:PBT+30%GF
L:LCP
- ④ Pitch
C:3.0mm Pitch
- ⑤ Contact Plating:
G0:Gold flash
G1:3u" gold
G2: 5u" gold
G3:10u" gold
G4:15u" gold
G5:30u" gold
- ⑥ Packing:
A:Tray
B:Bag
C:Tube
D:Tape Reel

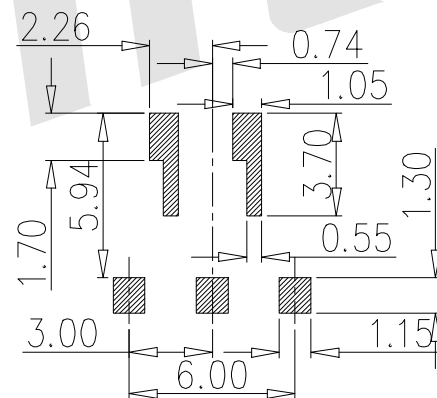

RECOMMENDED PCB LAYOUT

TOLERENCE ±0.05

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15


Antenk® ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm
 DRAW Wu Feng Rong DATE 09/03/2020
 CHECK BobYang DATE 07/03/2020

TITLE:
 3 Circuit Battery Connector 3.0 Centers

DRAWING NO: ABT01-03LCXD

PRODUCT NO: ABT01-03LCXD



REV	DESCRIPTION	DATE