

HSF



SPECIFICATION

Standard (参考标准): UL IEC
 Voltage Rating (额定电压): 300V 450V
 Current Rating (额定电流): 10A 13.5A
 Wire range (使用线径): 22-16AWG 1.0mm²
 Withstanding voltage (耐电压): AC2000V/1Min
 Insulation resistance (绝缘电阻): 500MΩ/DC500V
 Temp Rang (温度范围): -40° C ~ +105° C
 Max Torque (最大锁紧力矩): 0.5Nm (4.5lb. in)
 Housing (塑件): PA66, UL94V-0
 Screw (螺丝): Steel, M3.0 Ni-Plated
 Terminal (端子): Brass, 0.8t, Tin Plated
 Pitch (间距): 6.35mm
 Poles (极数): 2P-30P

Ordering Code:


AT816 - 6.35 - XX - X - A

Pitch: 6.35:6.35mm
 Poles: 02: 2 Contacts
 03: 3 Contacts

 22: 22 Contacts

Insulator color: Customer Request
 A:Green B:Blue
 C:Black G:Gray
 O:Orange T:Transparent
 R:Red Y:Yellow
 W:White

A:Series number.

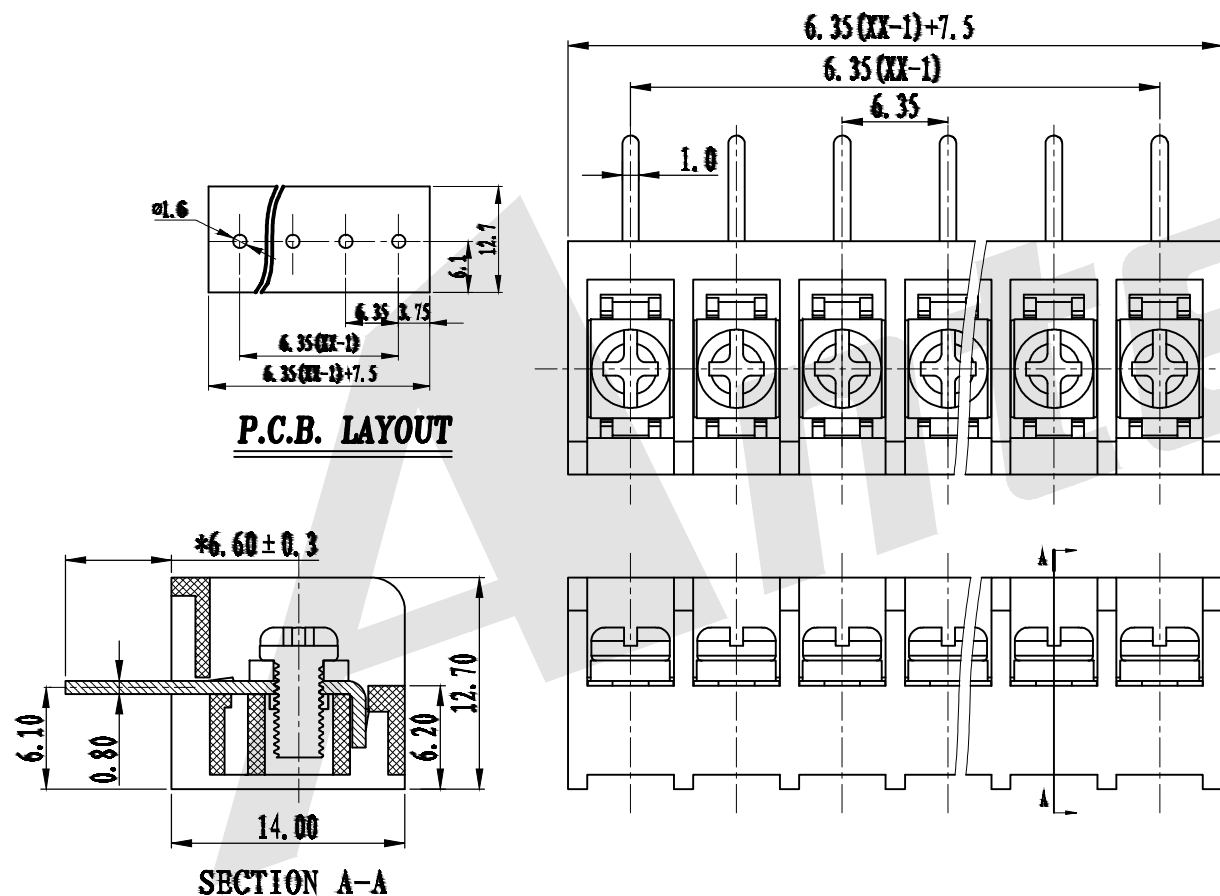


Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Antenk® ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm
 DRAW Wu Sai DATE 22/03/2018
 CHECK BobYang DATE 22/03/2018

TITLE: Barrier Terminal Block Pitch:6.35mm



DRAWING NO: AT816-6.35XXX-A
 PRODUCT NO: AT816-6.35XXX-A

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		