

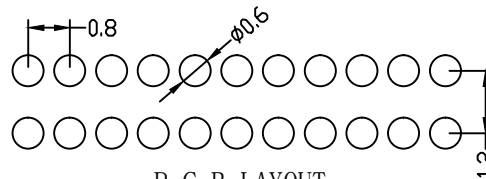
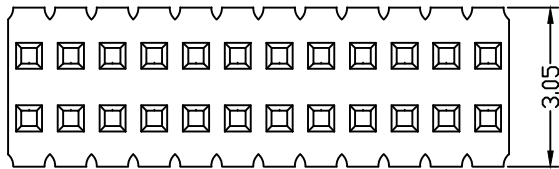


HSF

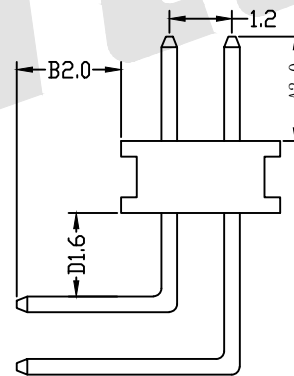

P. C. B LAYOUT

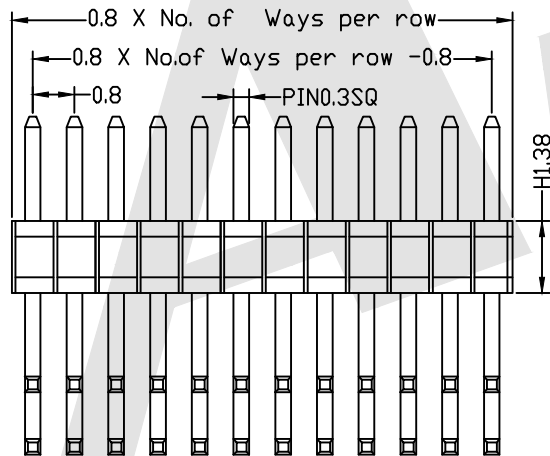

SPECIFICATIONS:

Current Rating: 0.75Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65° C to +125° C
 Contact Material: Brass
 Insulator Material: PA6T, UL94V-0, Color:Black

Ordering Code:

PHAR01 - X - X - D - A-D-B - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts: 02 To 100
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3u" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin
- ④ Connector Type:
 D: Dual
- ⑤ Pin Length:
 A:0200=2.00mm
 D:0160=1.60mm
 B:0200=2.00mm
 Please mark the desired length in the A/D/B
- ⑥ Insulator Material:
 B:PA6T E:PA9T
 C:LCP
- ⑦ Packing:
 A:Tray
 B:Bag
 T:Tube
 U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP

Standard IE P/N :

PHAR01-10-G0-D-0200-0160-0200-B-B

A	D	B	Unless Otherwise specified tolerance	
2.0	1.6	2.0	X. XX: ±0.20	X. XXX: ±0.15
			X. X: ±0.25	X. XX: ±0.15

Antenk ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

Optional	SCALE: As Shown	UNIT: mm
	DRAW YG ZHONG	DATE 01/05/2016
	CHECK BobYang	DATE 01/05/2016

TITLE: 0.8mm Pin Header Dual
 Row Angle Type

2016/10/25	3rd ANGLE PROJECTION
DATE	

DRAWING NO: PHAR01-XXD-0200-0160-0200-XX

PRODUCT NO: PHAR01-XXD-0200-0160-0200-XX

REV	Increase packing method and material	2016/10/25
	DESCRIPTION	DATE