

HSF







SPECIFICATION

Current Rating: 3Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black

Ordering Code:


PHES07 - X - X - D - A - C - B - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No:
- ② No. of Contacts
02 To 80
- ③ Contact Plating:
G0: Gold flash S0: Selective
G1: 3u" Gold S1: Selective 3u"
G2: 5u" Gold S2: Selective 5u"
G3: 10u" Gold S3: Selective 10u"
G4: 15u" Gold S4: Selective 15u"
G5: 30u" Gold S5: Selective 30u"
SN: Tin
- ④ Connector Type
D: Dual
- ⑤ Pin Length:
A: 0600=6.00mm
C: 0675=6.75mm
B: 0300=3.00mm
Please mark the desired length in the A/C/B
- ⑥ Insulator Material
A: PBT
B: PA6T
C: LCP
D: PA46
E: PA9T
- ⑦ Packing:
A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP
- ⑧ Shape option
A: Type 1
B: Type 2
- ⑨ Plastic High
H1: 1.7mm
H2: 2.54mm
H3: 2.00mm
H4: 1.50mm

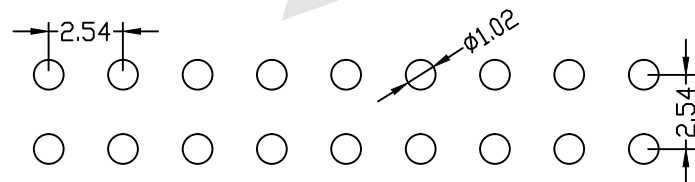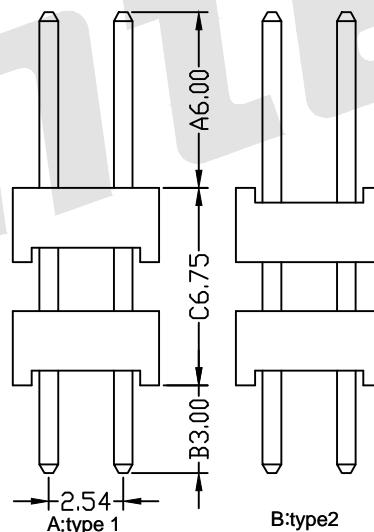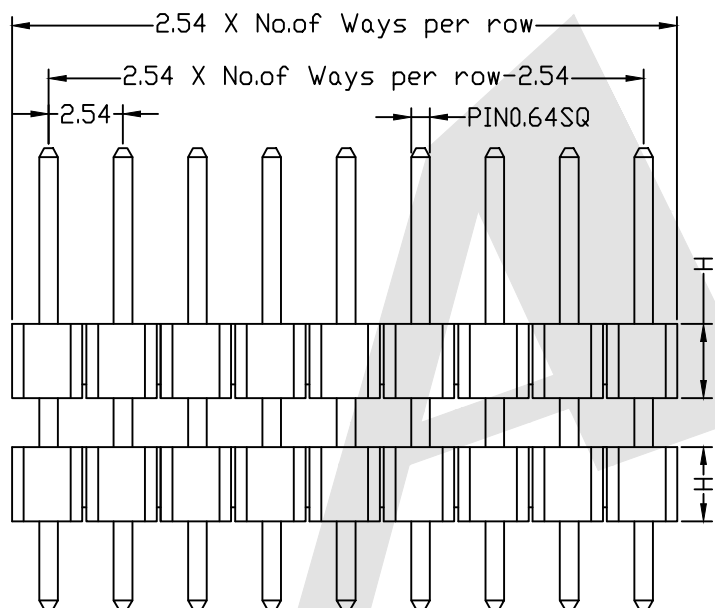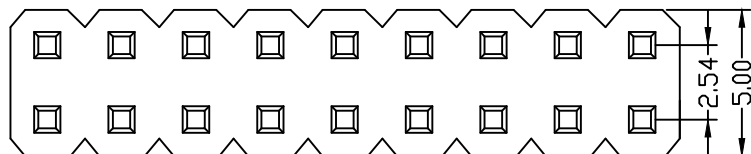

PCB LAYOUT

Standard IE P/N :			PHES07-10-G0-D-0600-0675-0300-A-B-A-H1		
A	C	B	Unless Otherwise specified tolerance		
6.00	6.75	3.00	X. ±0.35	X. XX: ±0.20	
			X. X: ±0.25	X. XXX: ±0.15	
Optional		SCALE:	UNIT:		
		As Shown	mm		
		DRAW	DATE		
		YG ZHONG	01/05/2016		
		CHECK	DATE		
		BobYang	01/05/2016		
2017/04/14		TITLE:			
2016/10/25		2.54mm Pin Header DualRow Double Plastic Straight Type			
REV		DRAWING NO:		PHES07-XXD-0600-0675-0300-XXX	
DESCRIPTION		PRODUCT NO:		PHES07-XXD-0600-0675-0300-XXX	



ADD H4=1.5MM
 Increase packing method and material