

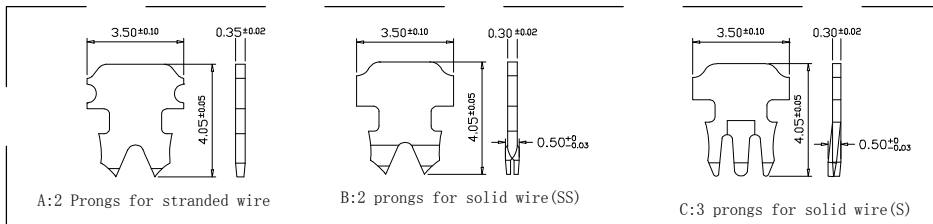


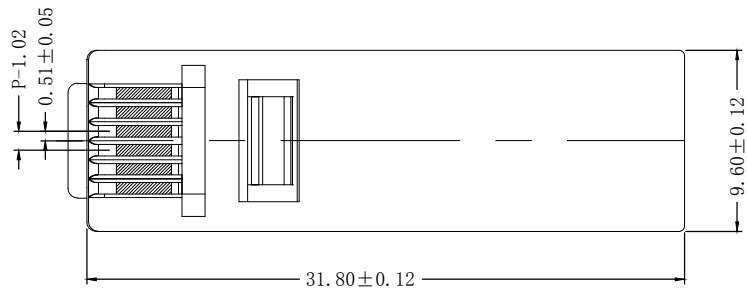

ROHS

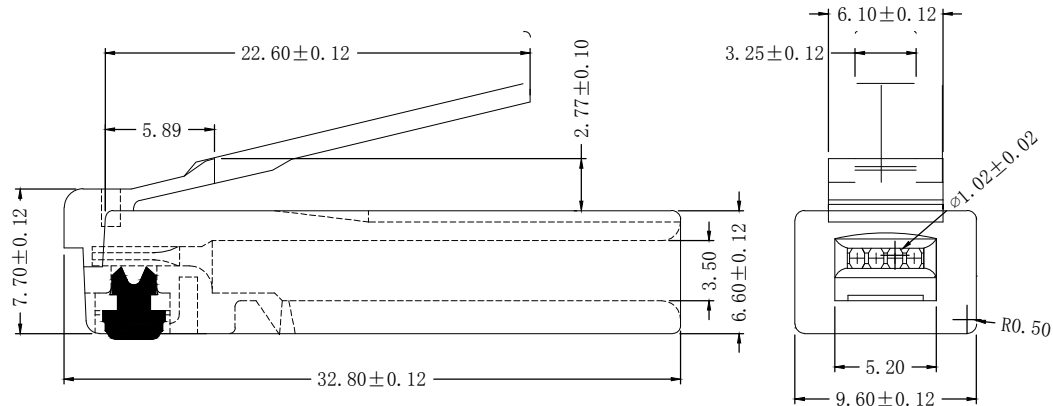

FEATURES:

1 Electrical Test:

- A. 250V AC max at 2 amps.
- B. Dielectric with standing 500volts AC.
- C. Insulation Resistance:500 megaohms.
- D. Termination Resistance:35megaohms.

2 Mechanical:

- A. Cable-to-Plug tensile strength-20LBs (89N) min.
- B. Durability:500 mating cycles.

Ordering Code:

ATRP6P6C - X - A - X - 004  
 ①            ②            ③            ④            ⑤

1. Series:

2. Housing Material:

- A:UL 94V-0
- B:UL 94V-2

3. Contact Type:

- A:2 Prongs for stranded wire
- B:2 prongs for solid wire(SS)
- C:3 prongs for solid wire(S)

4. Gold plating :

- A:1u"    B:3u"
- C:6u"    D:15u"
- E:30u"    F:50u"

5. Serial number:

Unless Otherwise specified tolerance  
 X. ±0.35    X.XX: ±0.20  
 X.X: ±0.25    X.XXX: ±0.15




ANTENK ELECTRONICS CO., LTD  
 Http://www.antenk.com  
 E-mail:sales@antenk.com

SCALE: As Shown    UNIT: mm

DRAW Wu Feng Rong    DATE 16/09/2019

CHECK BobYang    DATE 16/09/2019

TITLE: Plug 6P6C Serial unshielded Type(VERY LONG BODY)



DRAWING NO: ATRP6P6C-XAX-004

PRODUCT NO: ATRP6P6C-XAX-004

REV	DESCRIPTION	DATE