





HSF

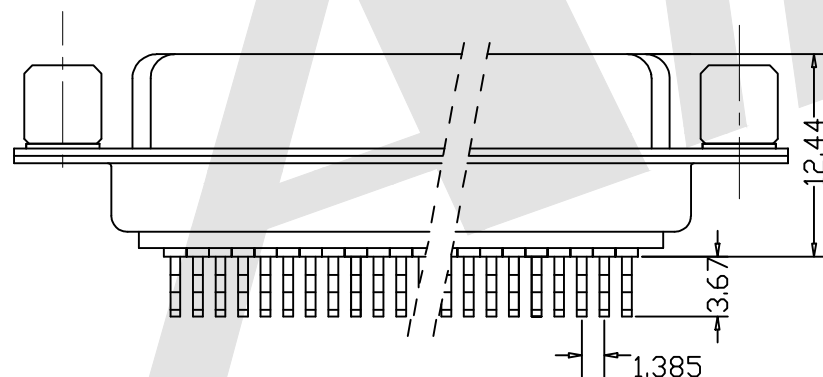

	09pin	15pin	25pin	37pin
A	16.33	24.66	38.38	54.84
B	24.99	33.32	47.04	63.50
C	30.80	39.10	53.00	69.30

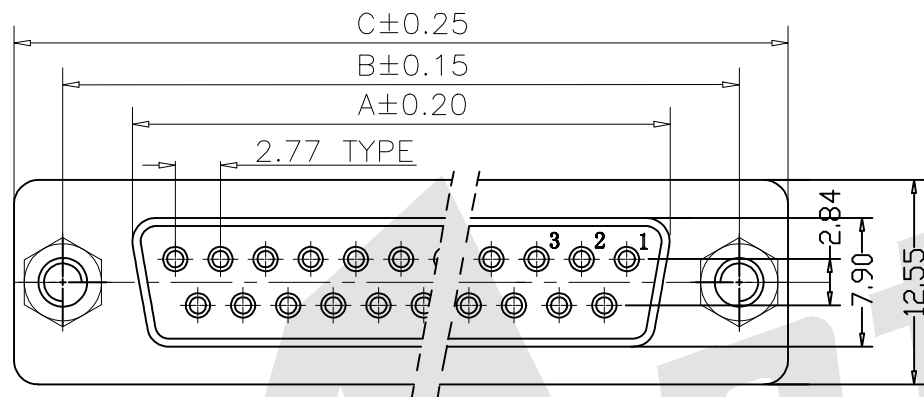

Material:
 Housing: Temperature Thermoplastics, PBT+G.F UL 94V-0
 Contact: Brass or Bronze
 Shell: 0.35T Steel Nickel Plating All Area
 Electrical Characteristics:
 Current Rating: 5A
 Contact Resistance: 20 milliohms Max
 Withstanding Voltage: 500V AC For 1 Minute
 Insulation Resistance: 1000 Megohms Min
 Operating Temperature: -55° C to +105° C

Ordering Code:

DP03- F - X - A - 0 - B - S
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Dual Row PCB Straddle type
- ② Contact Type:
F: Female
- ③ Contact NO. :
09=09pin 15=15pin
25=25pin 37=37pin
- ④ Mounting Option:
A: No accessories
B: Rear Rivet
C: Front Rivet
- ⑤ Accessories:
O: Non Accessories
A: Zinc alloy 4.8mm Nickel
A1: Zinc alloy 5.8mm Nickel
B: Iron 4.8mm Nickel
B1: Iron 5.8mm Nickel
C: Copper alloy 4.8mm Nickel
C1: Copper alloy 5.8mm Nickel
D: Copper screw 4.8mm Nickel
D1: Copper screw 5.8mm Nickel
- ⑥ Color Code:
W: White L: Blue
B: Black G: Grey
- ⑦ Contact Plating
S: Selective Gold
S1: Selective 3u" Gold
S2: Selective 5u" Gold
S3: Selective 10u" Gold
S4: Selective 15u" Gold
S5: Selective 30u" Gold
G0: Gold flash
G1: 3u" Gold over
G2: 5u" Gold over
G3: 10u" Gold over
G4: 15u" Gold over
G5: 30u" Gold over

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Antenk® ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail: sales@antenk.com

SCALE: As Shown UNIT: mm
 DRAW Lv Xun Hua DATE 19/03/2019
 CHECK BobYang DATE 19/03/2019

TITLE: D-SUB PCB Female Dual Row Straddle Type (stamped Pin)

DRAWING NO: DP03-FXXXXX

PRODUCT NO: DP03-FXXXXX



REV	DESCRIPTION	DATE