
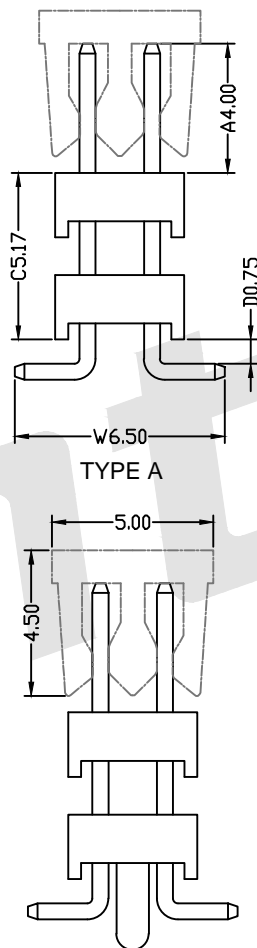
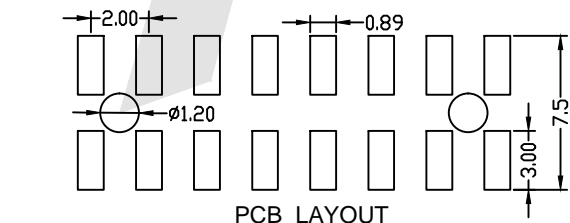
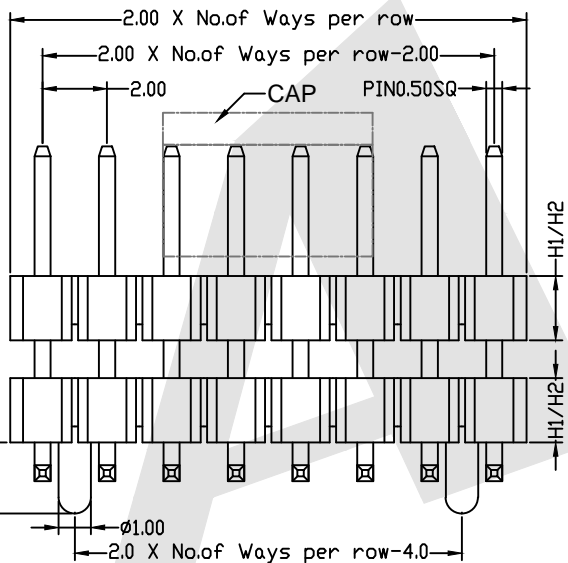


HSF

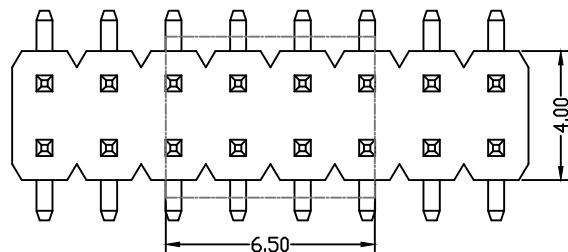

SPECIFICATION

Current Rating: 1.5 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PA6T,UL 94V-0 Black

Ordering Code:

PHDM06 - X - X - D - A - C - D - W - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No:
- ② No. of Contacts: 02 To 80
- ③ Contact Plating: G0:Gold flash S0:Selective
 G1:3u" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin
- ④ Connector Type: D:Dual
- ⑤ Pin Length: A:0400=4.00mm
 C:0517=5.17mm
 D:0075=0.75mm
 W:0650=6.50mm
 Please mark the desired length in the A/C/D/W
- ⑥ Insulator Material: A:PBT B:PA6T
 C:LCP D:PA46
 E:PA9T
- ⑦ Packing: A:Tray B:Bag
 T:Tube U:Tube+CAP
 R:Tape&Reel W:Tape&Reel+CAP
- ⑧ With locating pegs option: A:Type A without pegs
 B:Type B with pegs
- ⑨ Plastic High: H1:1.5mm
 H2:2.0mm

Standard IE P/N : PHDM06-10-G0-D-0400-0517-0075-0650-B-B-A-H1


| | | | | | |
|----------|----------|----------|------------|--------------------------------------|--------------|
| A | C | D | W | Unless Otherwise specified tolerance | |
| 4.00 | 5.17 | 0.75 | 6.50 | X. ±0.35 | X.XX: ±0.20 |
| | | | | X.X: ±0.25 | X.XXX: ±0.15 |
| Optional | | SCALE: | UNIT: | | |
| | | As Shown | mm | | |
| DRAW | YG ZHONG | DATE | 01/05/2016 | | |
| CHECK | BobYang | DATE | 01/05/2016 | | |

Antenk ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE:
 2.00mm Pin Header DualRow Double Plastic SMT Type

REV Increase packing method and material

2016/10/25



DRAWING NO: PHDM06-XXD-0400-0517-0075-0650-XXXX

DESCRIPTION

DATE

PRODUCT NO: PHDM06-XXD-0400-0517-0075-0650-XXXX