

HSF



	09pin	15pin	25pin
A	16.92	25.25	38.96
B	24.99	33.32	47.04
C	30.80	39.10	53.00

Material:

Housing: Temperature Thermoplastics, PBT+G.F UL 94V-0

Contact: Brass or Bronze

Shell: 0.35T Steel Nickel Plating All Area

Electical Characteristics:

Current Rating: 5A

Contact Resistance: 15 milliohms Max

Withstanding Voltage: 500V AC For 1 Minute

Insulation Resistance: 1000 Megohms Min

Operating Temperature: -55° C to +105° C

Ordering Code:

DR02 - F - X - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

① Dual Row Angle DIP 5.08 Footprint

② Contact Type:

F:Female

③ Contact NO.:

09=09pin 15=15pin

25=25pin 37=37pin

④ Mounting Option:

A: Fork lock

B: Riveting

C: Riveting With screws

D: Rivet lock

⑤ Accessories:

0: Non Accessories

A: Zinc alloy 4.8mm Nickel

A1: Zinc alloy 5.8mm Nickel

B: Iron 4.8mm Nickel

B1: Iron 5.8mm Nickel

C: Copper alloy 4.8mm Nickel

C1: Copper alloy 5.8mm Nickel

D: Copper screw 4.8mm Nickel

D1: Copper screw 5.8mm Nickel

⑥ Color Code:

W: White L: Blue

B: Black G: Grey

⑦ Contact Plating

S: Selective Gold

S1: Selective 3u" Gold

S2: Selective 5u" Gold

S3: Selective 10u" Gold

S4: Selective 15u" GoldS

S5: Selective 30u" Gold

G0: Gold flash






G1: 3u" Gold over

G2: 5u" Gold over

G3: 10u" Gold over

G4: 15u" Gold over

G5: 30u" Gold over

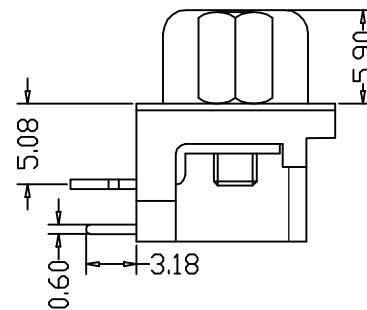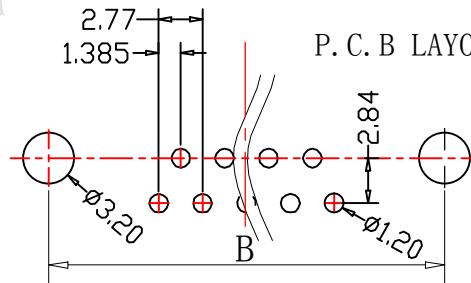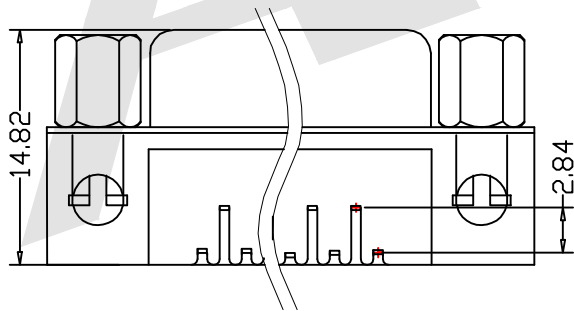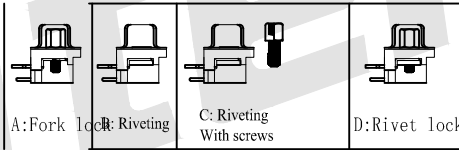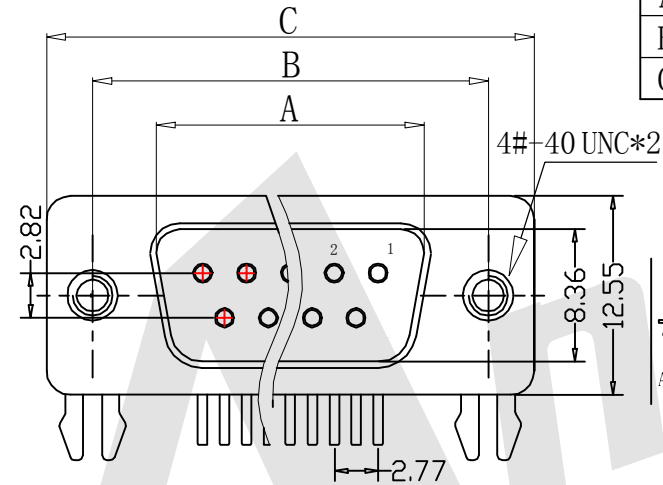

Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Antenk ANTEK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm

DRAW Lv Xun Hua DATE 08/03/2019

CHECK BobYang DATE 08/03/2019

TITLE: D-SUB PCB Female Dual Row Right
 Angle 5.08mm(stamped Pin)

DRAWING NO: DR02-FXXXXX

PRODUCT NO: DR02-FXXXXX



REV	DESCRIPTION	DATE