
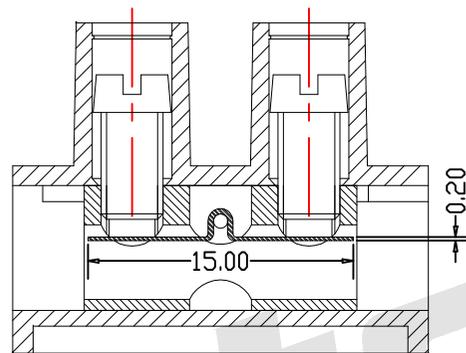


HSF

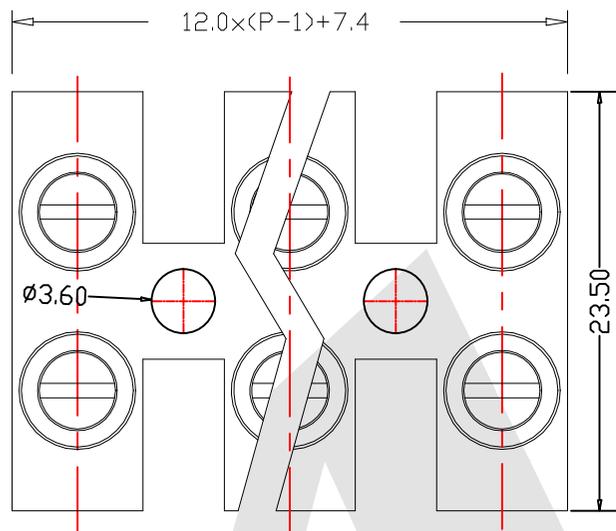




With Wire Cage
Type2

SPECIFICATION

Voltage Rating (额定电压): 300V
 Current Rating (额定电流): 30A
 Wire range (使用线径): 16-10AWG 6.0mm²
 Housing (塑件): PA66+23%GF, UL94V-0
 Solder Pin (接触材料): Brass, Nickel Plated (黄铜, 镀锡)
 Screw (螺丝): M3.5 Steel, Zinc Plated (钢, 镀锌)
 Torque (扭矩): 0.6N.m

Ordering Code:

AT802 -12.0 - XX - T - X - A

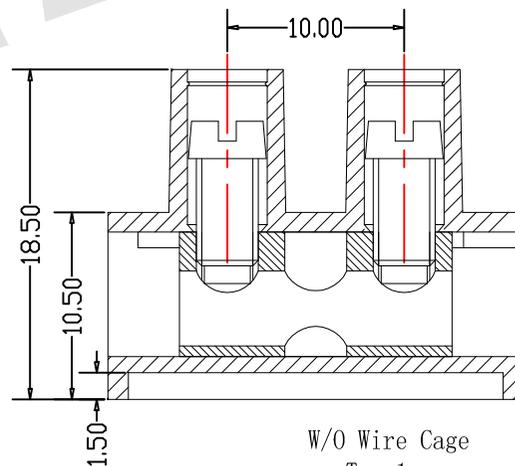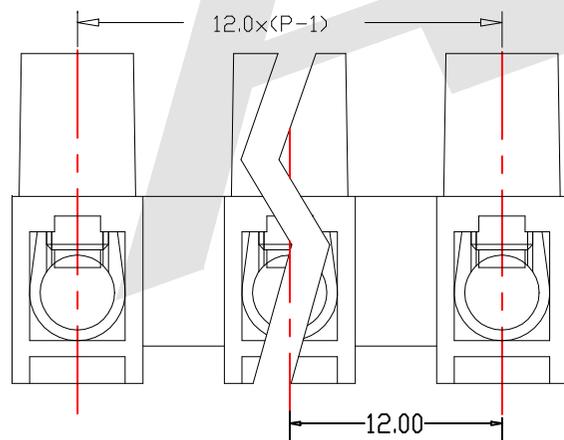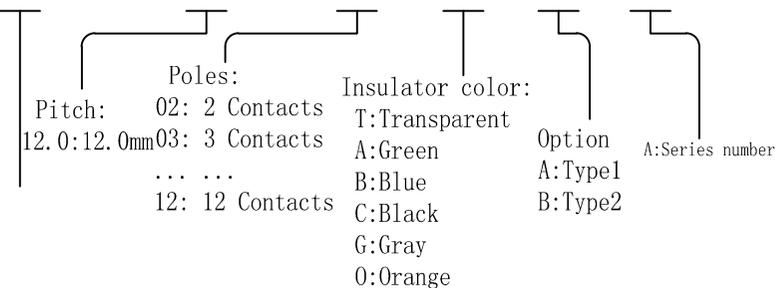

W/O Wire Cage
Type1


Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Antenk® ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

SCALE: As Shown	UNIT: mm
DRAW Wu Sai	DATE 22/03/2018
CHECK BobYang	DATE 22/03/2018

TITLE:
Feed Through Terminal Block Pitch:12.0 mm

DRAWING NO: AT802-12.0XXXX-A
 PRODUCT NO: AT802-12.0XXXX-A





REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		

HSF





RoHS

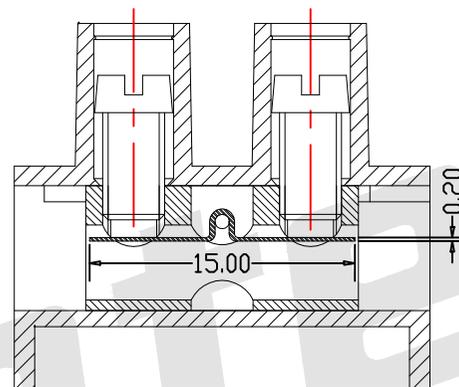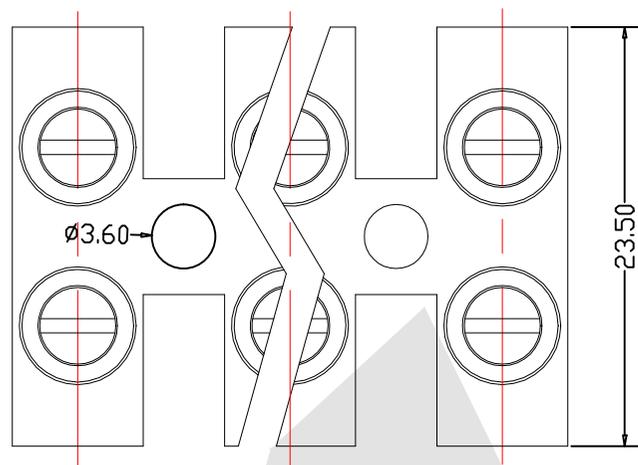

With Wire Cage
Type2

SPECIFICATION

Voltage Rating (额定电压): 300V
 Current Rating (额定电流): 30A
 Wire range (使用线径): 16-10AWG 6.0mm²
 Housing (塑件): PA66+23%GF, UL94V-0
 Solder Pin (接触材料): Brass, Nickel Plated (黄铜, 镀锡)
 Screw (螺丝): M3.5 Steel, Zinc Plated (钢, 镀锌)
 Torque (扭矩): 0.6N.m

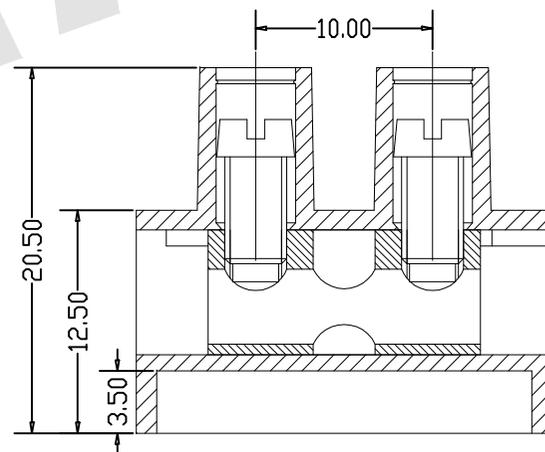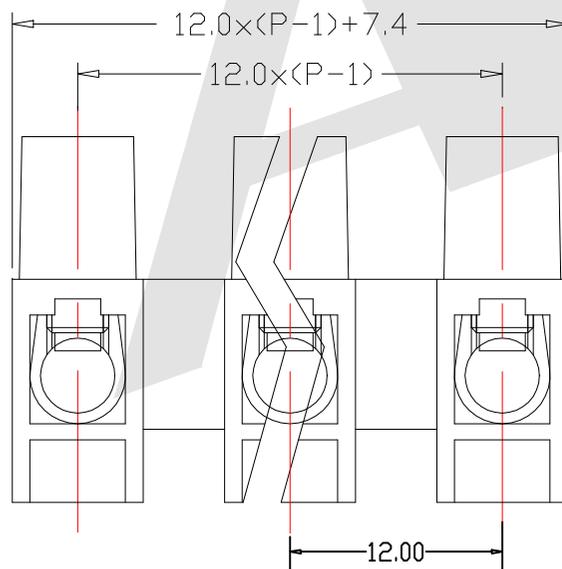

W/O Wire Cage
Type1

Ordering Code:

AT802H - 12.0 - XX - T - X - A


Poles: 02: 2 Contacts 03: 3 Contacts ... 12: 12 Contacts
 Pitch: 12.0: 12.0mm
 Insulator color: T: Transparent A: Green B: Blue C: Black G: Gray O: Orange
 Option A: Type1 B: Type2
 A: Series number

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Antenk® ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm
 DRAW Wu Sai DATE 22/03/2018
 CHECK BobYang DATE 22/03/2018

TITLE:
 Feed Through Terminal Block Pitch:12.0 mm



DRAWING NO: AT802H-12. 0XXXX-A
 PRODUCT NO: AT802H-12. 0XXXX-A

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		