

HSF



ROHS


SPECIFICATION

Current Rating: 1Amp  
 Insulation Resistance: 1000MΩmin  
 Contact Resistance: 20MΩmax  
 Withstand Voltage: 500V AC/DC  
 Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: PA6T+30%GF UL 94V-0  
 Operating Temperature: -40° C to +105° C


Ordering Code:

BHAM05 - X - X - X - X - X - X  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts  
10-100P
- ③ Contact Plating:  
G0:Gold flash S0:Selective  
G1:3u" Gold S1:Selective 3u"  
G2:5u" Gold S2:Selective 5u"  
G3:10u" Gold S3:Selective 10u"  
G4:15u" Gold S4:Selective 15u"  
G5:30u" Gold S5:Selective 30u"  
SN:Tin
- ④ Color Insulator  
B:Black  
U:Blue  
W:White
- ⑤ Insulator Material  
B:PA6T  
C:LCP  
E:PA9T
- ⑥ Packing  
A:Tray  
B:Bag  
T:Tube  
U:Tube+CAP  
R:Tape&Reel  
W:Tape&Reel+CAP
- ⑦ With locating pegs option  
A:Type A without pegs  
B:Type B with pegs

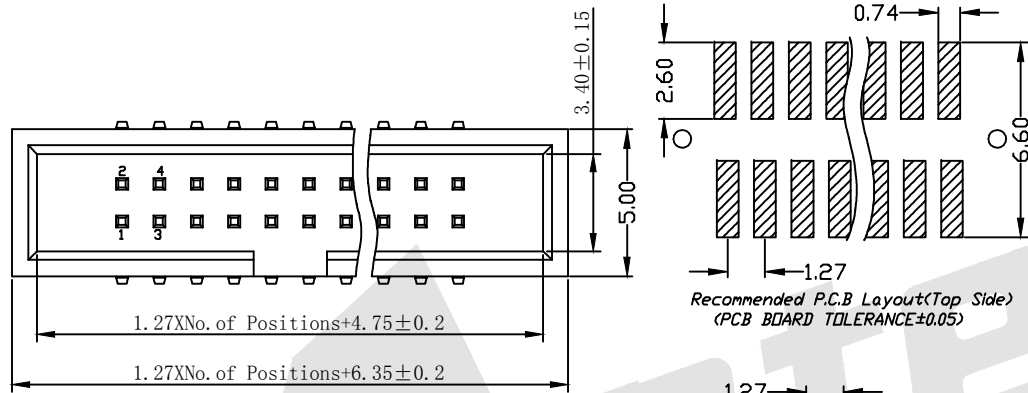


Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

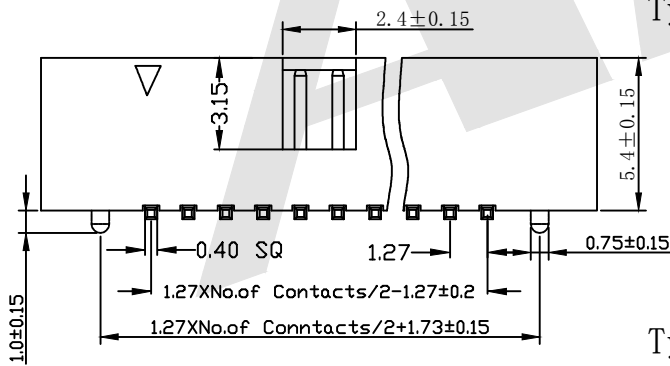

Type A

Type B

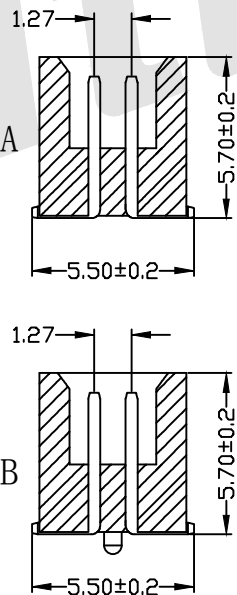

Unless Otherwise specified tolerance	
X. ±0.35	X.XX: ±0.20
X.X: ±0.25	X.XXX: ±0.15
SCALE: As Shown	UNIT: mm
DRAW YG ZHONG	DATE 01/05/2016
CHECK BobYang	DATE 01/05/2016

**Antenk** ANTENK ELECTRONICS CO.,LTD  
 Http://www.antenk.com  
 E-mail:sales@antenk.com

TITLE:  
1.27mm Box Header SMT, H=5.4mm

DRAWING NO: BHAM05-XXXXXXX

PRODUCT NO: BHAM05-XXXXXXX



REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		