

HSF








SPECIFICATION

Current Rating: 1.5Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PA6T UL 94V-0 Black

Ordering Code:

FHDU06 - X - X - D - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts
02 To 80
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3u" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin
- ④ Connector Type
D: Dual
- ⑤ Plastic High:
H: 4.3
Please mark the desired length in the H
- ⑥ Insulator Material
B: PA6T
C: LCP
D: PA46
E: PA9T
- ⑦ Packing
A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP
- ⑧ Din Width
A: Type 1
B: Type 2

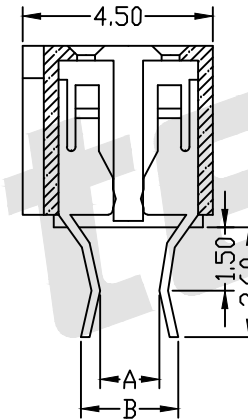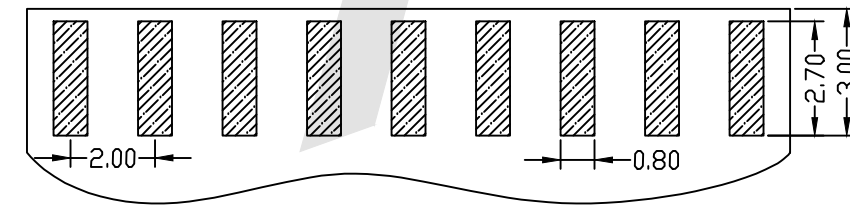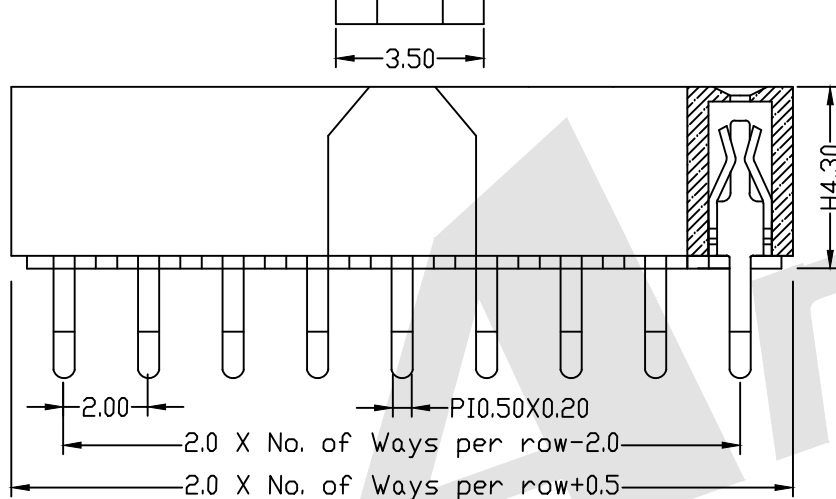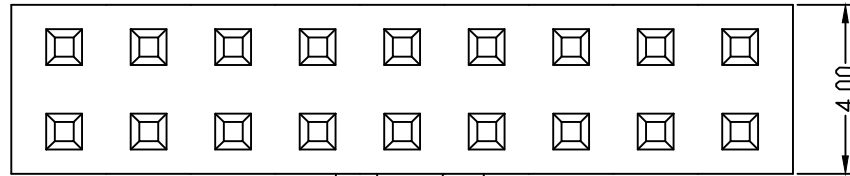


PCB LAYOUT

	DIN:A	DIN:B	Unless Otherwise specified tolerance	
Type1	0.80	1.60	X. ±0.35	X. XX: ±0.20
Type2	1.40	2.20	X. X: ±0.25	X. XXX: ±0.15
	SCALE: As Shown	UNIT: mm		

Antenk ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

DRAW YG ZHONG DATE 01/05/2016
 CHECK BobYang DATE 01/05/2016

TITLE:
2.00mm Female Header Dual Row Splint Type With Bump



DRAWING NO: FHDU06-XXDXXXX

PRODUCT NO: FHDU06-XXDXXXX

REV	DESCRIPTION	DATE