

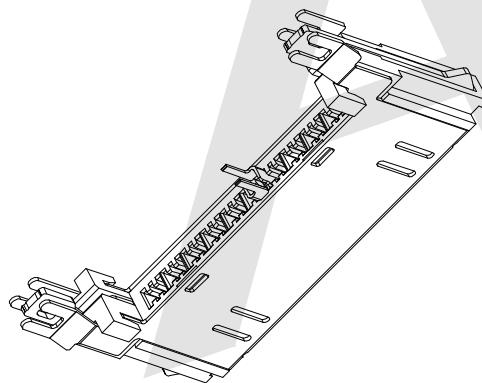


HSF

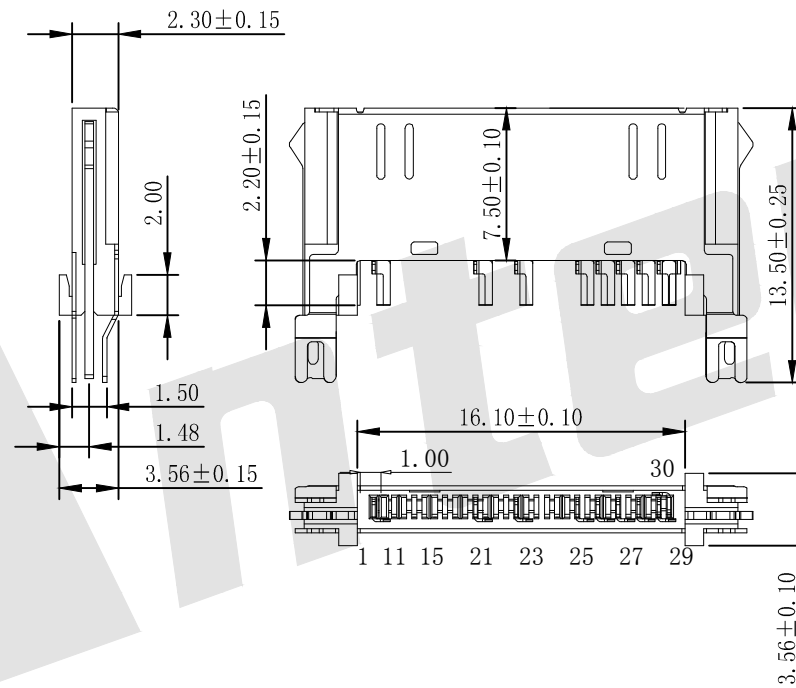

RoHS

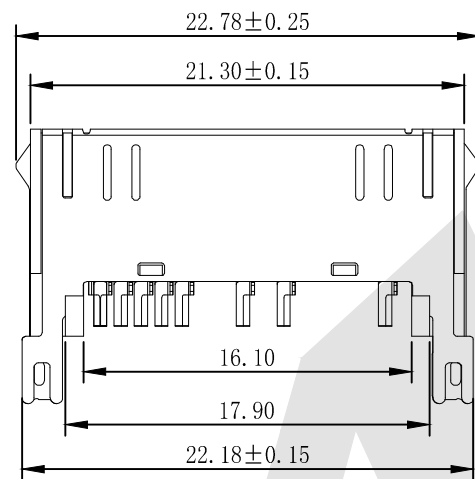

Remark
material:

- A: HOUSING: PA46
- B: CONTACTS: COPPER ALLOY
- C: SHELL: STAINLESS STEEL

UAMM04 - $\frac{X}{1}$ - $\frac{X}{2}$ - $\frac{X}{3}$ - $\frac{X}{4}$ - $\frac{X}{5}$ - $\frac{X}{6}$ - $\frac{X}{7}$


- ① Series No: slim plug connector apple
- ② Shell Material: B:Brass I:Iron S:stainless steel
- ③ Insulator Material: P:PBT+30%GF L:LCP A:PA46 B:ABS
- ④ Contact Material: B:Brass P:phosphor copper
- ⑤ Contact Plating G0: Gold flash G1: 3u" Gold G2: 5u" Gold G3: 10u" Gold G4: 15u" Gold G5: 30u" Gold
- ⑥ Insulator color: B:Blue C:Black G:Gray W:White
- ⑦ Packing A:Tray B:Bag C:Tube D:Tape &Reel

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm
DRAW Lv Xun Hua DATE 20/06/2019
CHECK BobYang DATE 20/06/2019



TITLE: apple slim plug connector, 30p

DRAWING NO: UAMM04-XXXXXX

PRODUCT NO: UAMM04-XXXXXX

REV	DESCRIPTION	DATE