

HSF



ROHS





SPECIFICATION

Current Rating: 3Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

PHER08 - X - X - D - A - D1 - D2 - B - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts
02 To 80
- ③ Contact Plating:
G0: Gold flash S0: Selective
G1: 3u" Gold S1: Selective 3u"
G2: 5u" Gold S2: Selective 5u"
G3: 10u" Gold S3: Selective 10u"
G4: 15u" Gold S4: Selective 15u"
G5: 30u" Gold S5: Selective 30u"
SN: Tin
- ④ Connector Type
D: Dual
- ⑤ Pin Length:
A: 0600=6.00mm
D1: 0483=4.83mm
D2: 0404=4.04mm
B: 0300=3.00mm
Please mark the desired length in the A/D1/D2/B
- ⑥ Insulator Material
A: PBT
B: PA6T
C: LCP
D: PA46
E: PA9T
- ⑦ Packing:
A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP
- ⑧ Plastic High
H1: 1.70mm
H2: 2.54mm
H3: 2.00mm
H4: 1.50mm

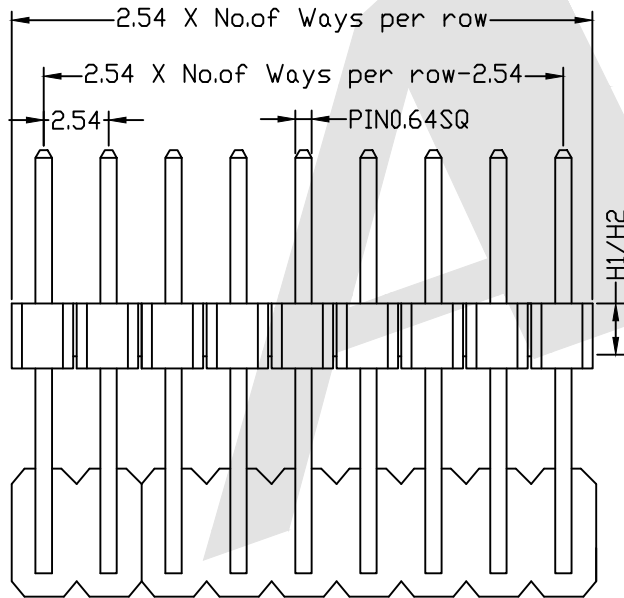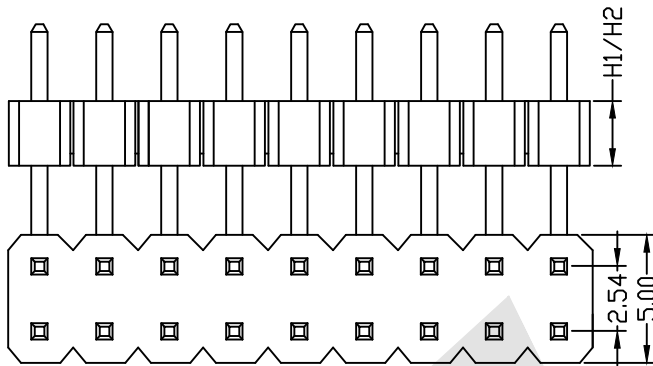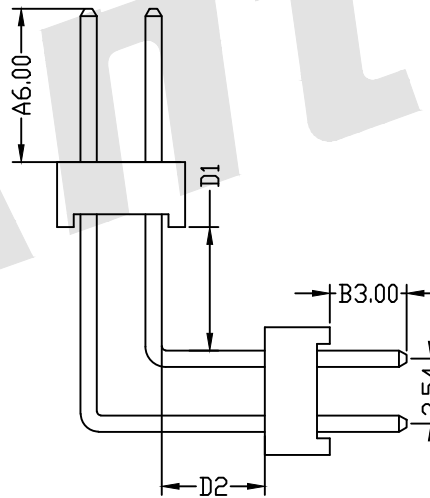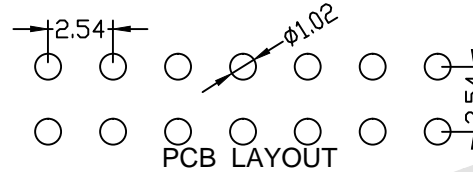

Standard IE P/N :				PHER08-10-G0-D-0600-0483-0404-0300-A-B-H1	
A	D1	D2	B	Unless Otherwise specified tolerance	
6.00	4.83	4.04	3.00	X. ±0.35	X. XX: ±0.20
				X. X: ±0.25	X. XXX: ±0.15
Optional				SCALE: As Shown	UNIT: mm
DRAW YG ZHONG				DATE 01/05/2016	TITLE: 2.54mm Pin Header Dual Row Double Plastic Angle Type
CHECK BobYang				DATE 01/05/2016	
ADD H4=1.5MM				2017/04/14	
Increase packing method and material				2016/10/25	
REV	DESCRIPTION			DATE	

Antenk ANTEK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com



DRAW	DATE	TITLE: 2.54mm Pin Header Dual Row Double Plastic Angle Type
CHECK	DATE	
ADD H4=1.5MM		DRAWING NO: PHER08-XXD-0600-0483-0404-0300-XXX
Increase packing method and material		
REV	DESCRIPTION	DATE