

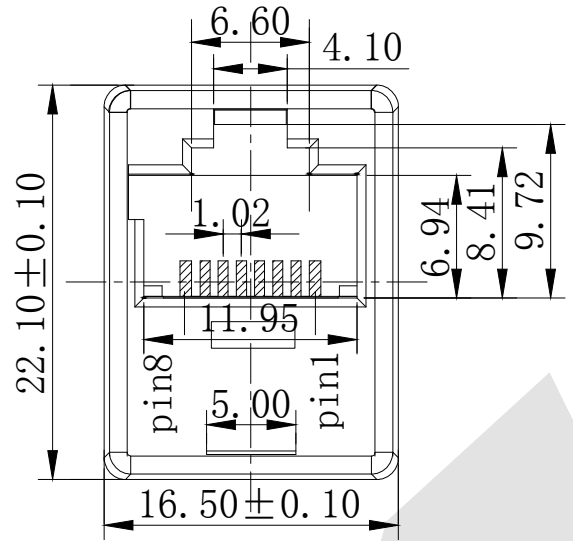


HSF  ROHS

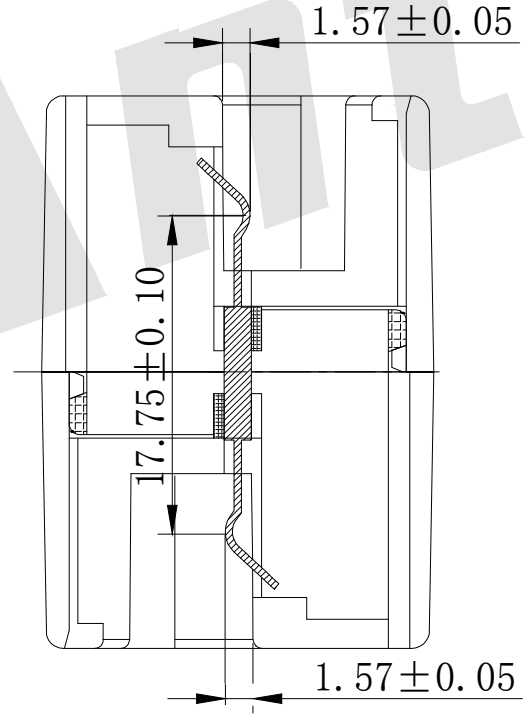

Method of connecting

- wire:
- 1 — 1
  - 2 — 2
  - 3 — 3
  - 4 — 4
  - 5 — 5
  - 6 — 6
  - 7 — 7
  - 8 — 8

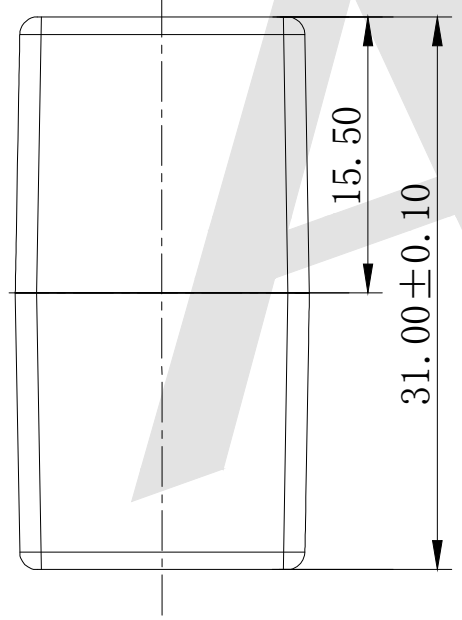

NOTE:

ELECTRICAL:

1. VOLTAGE RATING: 250 V AC MAX
2. CURRENT RATING: 2 AMP
3. DIELECTRIC WITH STANDING: 500V AC
4. INSULATION RESISTANCE: 500m Ω
5. TERMINATION RESISTANCE: 35m Ω

MATERIAL&FINISH:

1. ABS, HB OR UL94-0
2. CONTACT: Phosphor bronze alloy gold plated over nickel round pin  $\phi 0.45\text{mm}$
3. Gold plating thickness options: FU, 3u", 6u", 15u", 30u", 50 u" Micro inch

MECHANICAL:

1. Corpus to corpus tensile strength 20LBS (89N) min
2. Durability: 500 mating cycles


Ordering Code:

RJKS - 005  
 ① ②

① Series: Keystone Jacks


② Serial number:

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15

 ANTENK ELECTRONICS CO., LTD  
[Http://www.antenk.com](http://www.antenk.com)  
 E-mail: sales@antenk.com

SCALE: As Shown	UNIT: mm
DRAW Wu Feng Rong	DATE 22/03/2018
CHECK BobYang	DATE 22/03/2018

TITLE:  
CAT5E couple keystone, short body



DRAWING NO: **RJKS-005**  
 PRODUCT NO: **RJKS-005**

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		