HSF Pb RoHS

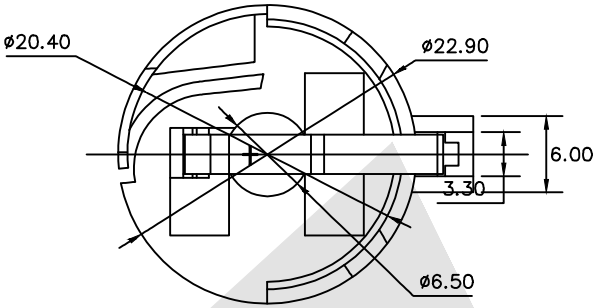

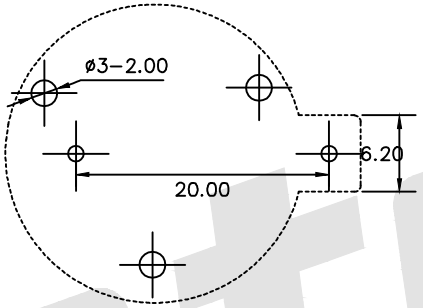

PCB LAYOUT

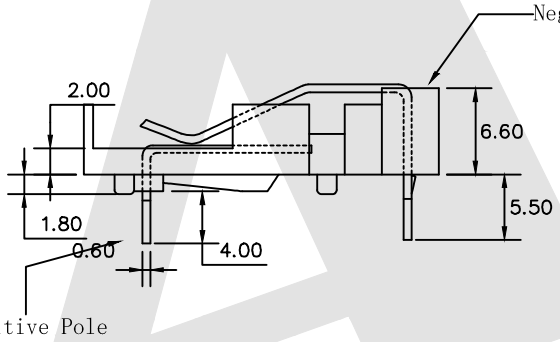

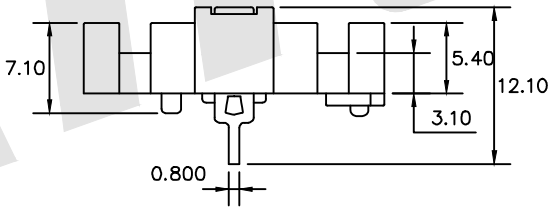

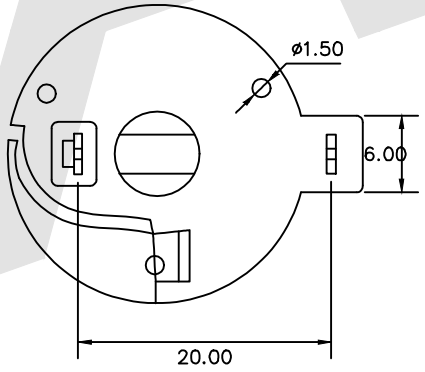

NOTE:

1, Material:

a. Housing:PA BK V0 GG30.15

b. Contact:C2680(Surface Plating:Sn 10u″)

2, Electric:

a. Contact Resistiance:30 Milliohms Max

b. Insulation Resistance:1000 MEGA OHMS Min

c. Dielectric Voltage:500V AC One Sea Level

d. Operating Temperature: -55° To 105°

Order code:

BT — S — SN — A- CR2032B

① ② ③ ④ ⑤

① BT: Coin Cell Holders

② Apperance for the product
M:SMT TYPE
S:180 TYPE
R:90 TYPE

③ Contact PIating
SN:Tin
GO:GOld flash
G1: 3U″ Gold
G2: 5U″ Gold
G3:10U″ Gold
G4:15U″ Gold
G5:30U″ Gold

④ Packing method
A: Tray packing
R: Tape & reel packing

⑤ Product number
CR2032B

REV	DESCRIPTION	DATE
	change BT-S-SN-CR2032C to BT-S-SN-A-CR2032B	01/13/2019

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown	UNIT: mm
DRAW Jack Bao	DATE 01/13/2019
CHECK BobYang	DATE 01/13/2019

3rd ANGLE PROJECTION

ANTENK ELECTRONICS CO,.LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: Coin Cell Holders For CR2032

DRAWING NO: BT-S-SN-A-CR2032B

PRODUCT NO: BT-S-SN-A-CR2032B