


SECTION A-A

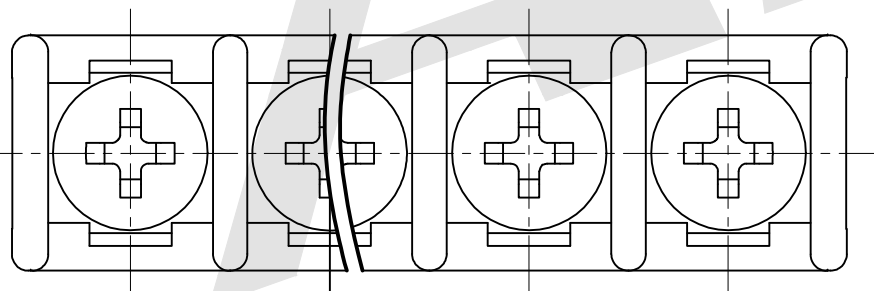


SPECIFICATION


Standard(参考标准): UL IEC
 Voltage Rating (额定电压): 300V 450V
 Current Rating(额定电流): 10A 17.5A
 Wire range(使用线径): 22-16AWG 1.5mm²
 Withstanding voltage(耐电压): AC2000V/1Min
 Insulation resistance(绝缘电阻): 500MΩ/DC500V
 Temp Rang(温度范围): -40° C ~ +105° C
 Max Torque(最大锁紧力矩): 0.5Nm(4.5lb. in)
 Housing(塑件): PA66, UL94V-0
 Screw(螺丝): Steel, M3.0 Ni-Plated
 Terminal(端子): Brass.0.8t, Tin Plated
 Pitch(间距): 7.62mm
 Poles(极数): 2P-24P

Ordering Code:

AT828 - 7.62 - XX - X - 01

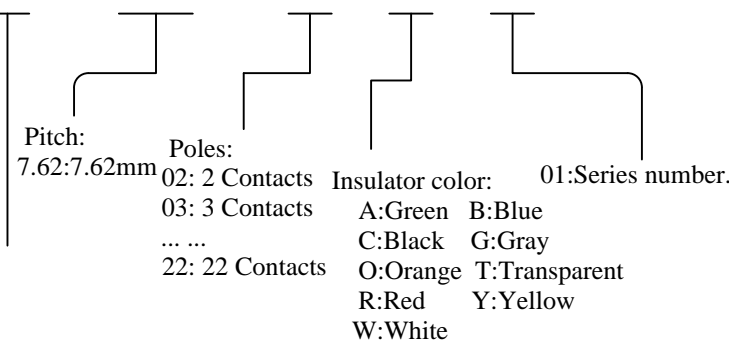


Unless Otherwise specified tolerance
 X.±0.35 X.XX:±0.20
 X.X:±0.25 X.XXX:±0.15

 ANTENK ELECTRONICS
 www.antenk.com
 E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm
 DRAW Wu Sai DATE 22/03/2018
 CHECK Bob Yang DATE 22/03/2018

TITLE: Barrier Terminal Block Pitch:7.62mm



DRAWING NO: AT828-7.62XXX-01
 PRODUCT NO: AT828-7.62XXX-01

REV	DESCRIPTION	DATE