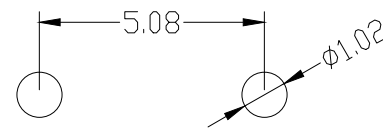
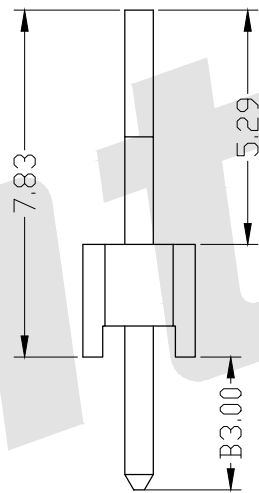
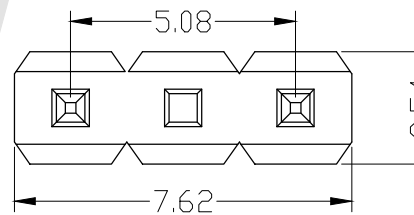
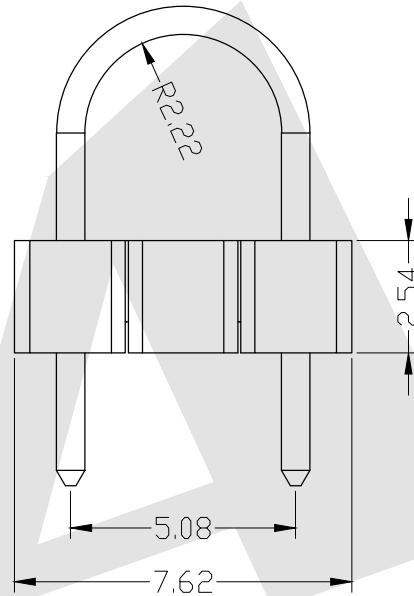
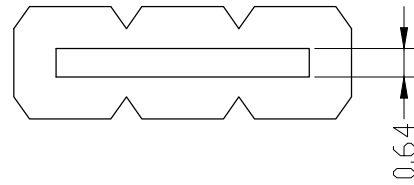


HSF

RoHS

SPECIFICATIONS:

Current Rating: 3 Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65° C to +125° C
 Contact Material: Brass
 Insulator Material: PBT, UL 94V-0 Black





Ordering Code:

PHEU01 - 03 - X - X - X - X - 01
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts: 03
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3U" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin
- ④ Pin Length:
 B:0300=3.00mm
 Please mark the desired length in the B
- ⑤ Insulator Material:
 A:PBT
 B:PA6T
 C:LCP
 D:PA46
 E:PA9T
- ⑥ Packing:
 A:Tray
 B:Bag
 T:Tube
 U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP
- ⑦ Number:
 01

PCB LAYOUT

Standard IE P/N :		PHEU01-03XXXX01	
B	Unless Otherwise specified tolerance		 ANTENK ELECTRONICS CO.,LTD Http://www.antenk.com E-mail:sales@antenk.com
	3.00	X. ±0.35 X.XX: ±0.20 X.X: ±0.25 X.XXX: ±0.15	
Optional	SCALE: As Shown	UNIT: mm	TITLE: 2.54mm Pin Header Single Row 180 Degrees Hook Type DRAWING NO: PHEU01-03XXXX01 PRODUCT NO: PHEU01-03XXXX01
	DRAW Wu Feng Rong	DATE 15/01/2020	
	CHECK BobYang	DATE 01/05/2016	
REV	Increase packing method and material	2016/10/25	 3rd ANGLE PROJECTION
	DESCRIPTION	DATE	

1	2	3	4	5
REV	DESCRIPTION			DATE