

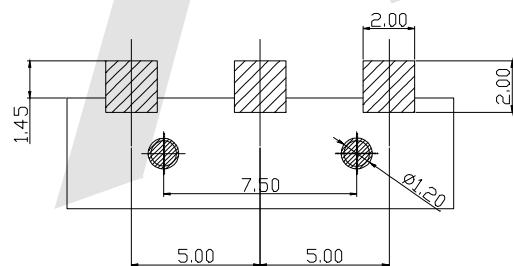
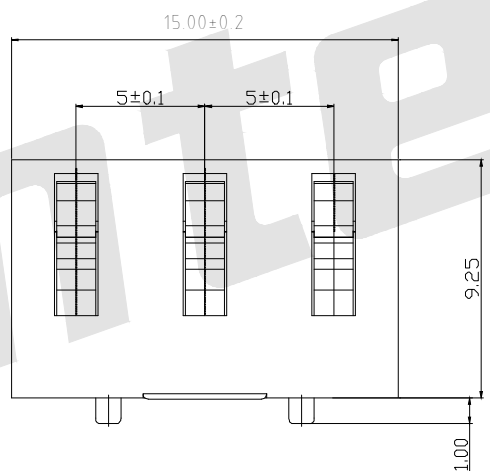
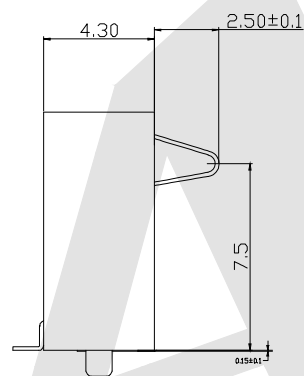



HSF

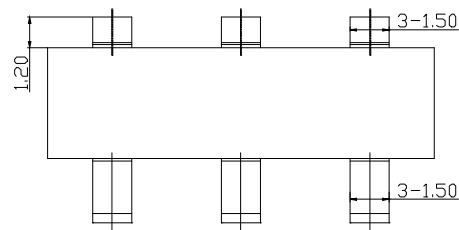

ROHS

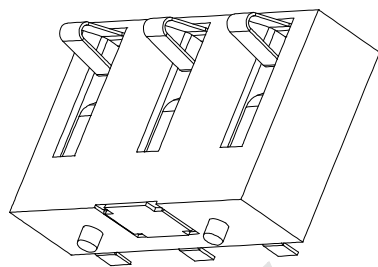

P. C. B Layout

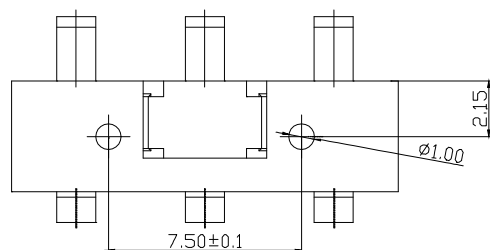

MATERIALS:

CURRENT RATING: 1.5A
 VOLTAGE RATING: 50V
 DIELECTRIC WITHSTAND RESISTANCE: 500V
 CONTACT RESISTANCE: 30mΩ
 INSULATION RESISTANCE: 500mΩ
 OPERATING TEMPERATURE: -20°C ~ +85°C
 INSULATOR MATERIAL: LCP
 CONTACT MATERIAL: PHOSPHOR COPPER ,
 GOLD PLATING

Ordering Code:

ABT02 - 03 - L - H - X - D
 ① ② ③ ④ ⑤ ⑥

- ① Series No:
 - ② No. of Contacts
 - ③ Insulator Material:
 - ④ Pitch
 - ⑤ Contact Plating:
 - ⑥ Packing:
- G0: Gold flash
 G1: 3u" gold
 G2: 5u" gold
 G3: 10u" gold
 G4: 15u" gold
 G5: 30u" gold
- P: PBT+30%GF
 L: LCP
 H: 5.0mm Pitch
 A: Tray
 B: Bag
 C: Tube
 D: Tape Reel

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Antenk® ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail: sales@antenk.com

SCALE: As Shown UNIT: mm
 DRAW Wu Sai DATE 22/03/2018
 CHECK BobYang DATE 22/03/2018

TITLE:
 3 Circuit Battery Connector 5.0 Centers



DRAWING NO: ABT02-03LHXD
 PRODUCT NO: ABT02-03LHXD

REV	DESCRIPTION	DATE