HSF Pb RoHS

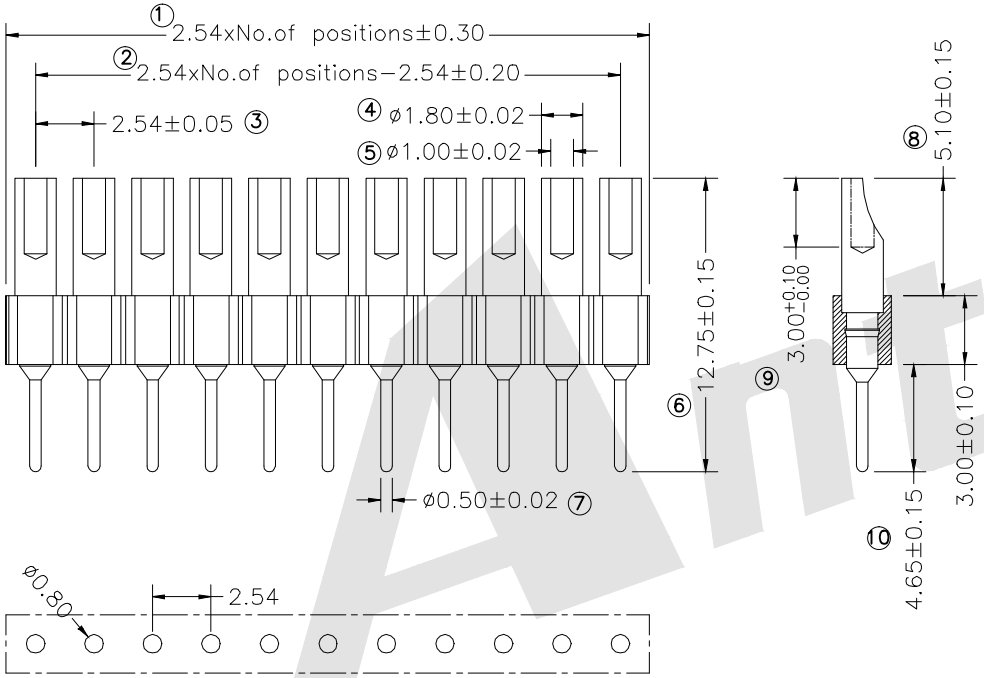

P.C.B LAYOUT

Technical Date
Materal:
Pin(outer sleeve)Brass,machined CuZn38Pb2
Plating(outer sleeve)
Tin Plated:2m/80μ" N,5μm/200μ" Sn
Gold Pated: 2μm/80μ" N, 0.8μ" gold
Insuiator: PPS UL94V-0

Electrical:
Current rating: 3AmPs/contact max。
Current resistance: ≤4mΩ/contact
I nsuiation resistance: ≥1000MΩat V=100V

OPerating vcitage: 60VAC/DC

Mechanical:
OPerating TemPerature: -40° C to+105°
Soldering TemPerature: +255°

Ordering Code:

MPHES - X - X - X - 05
① ② ③ ④ ⑤

① MPHES series

② Contact NO:
XX=XXpin
For example:
06=06pin

③ Pin Plated
0; No
1; Tin 150 μ"
2; Tin 200 μ"
3; G/F
4; Gold 3 μ"
5; Gold 10 μ"
6; Gold 15 μ"
S; Special

④ Packing
A:Tray B:Bag
C:Tube D:Tape Reel

⑤ Series number
05

REV	DESCRIPTION	DATE

Unless Otherwise specified tolerance
X.±0.35 X.XX:±0.20
X.X:±0.25 X.XXX:±0.15

SCALE: As Shown	UNIT: mm
DRAW Wu Sai	DATE 22/03/2018
CHECK BobYang	DATE 22/03/2018

3rd ANGLE PROJECTION

ANTENK ELECTRONICS CO,.LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: Machined Pin connectors 2.54 mm: MPHES series

DRAWING NO: MPHES-XXX05
PRODUCT NO: MPHES-XXX05