

HSF







### SPECIFICATION

Current Rating: 3 Amp  
 Insulation Resistance: 1000M ohms min  
 Contact Resistance: 20M ohms max  
 Dielectric Withstanding: AC500V  
 Operating Temperature: -65°C to +125°C  
 Contact Material: Brass  
 Insulator Material: PBT,UL 94V-0 Black

### Ordering Code:

$\text{PHER05} - \text{X} - \text{X} - \text{D} - \text{A} - \text{B} - \text{X} - \text{X}$   
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts  
02 To 80
- ③ Contact Plating:  
G0:Gold flash S0:Selective  
G1:3U" Gold S1:Selective 3u"  
G2:5u" Gold S2:Selective 5u"  
G3:10u" Gold S3:Selective 10u"  
G4:15u" Gold S4:Selective 15u"  
G5:30u" Gold S5:Selective 30u"  
SN: Tin
- ④ Connector Type  
D: Dual
- ⑤ Pin Length:  
A:0600=6.00mm  
B:0300=3.00mm  
Please mark the desired length in the A/B
- ⑥ Insulator Material  
A:PBT  
B:PA6T  
C:LCP  
D:PA46  
E:PA9T
- ⑦ Packing:  
A:Tray  
B:Bag  
T:Tube  
U:Tube+CAP  
R:Tape&Reel  
W:Tape&Reel+CAP

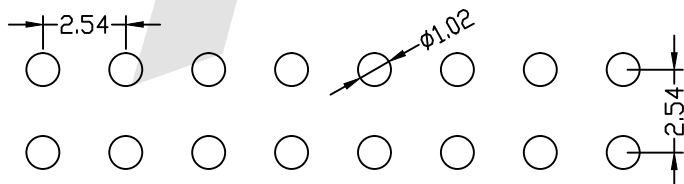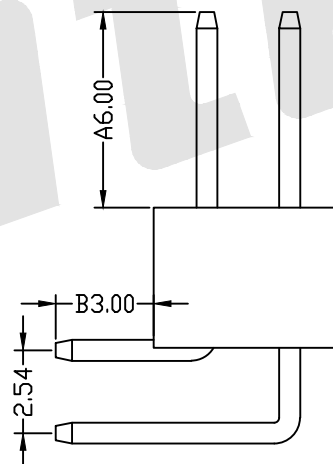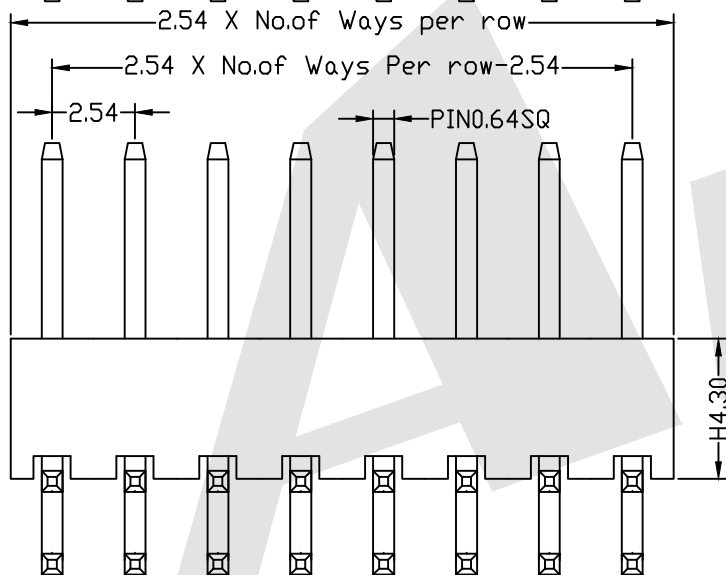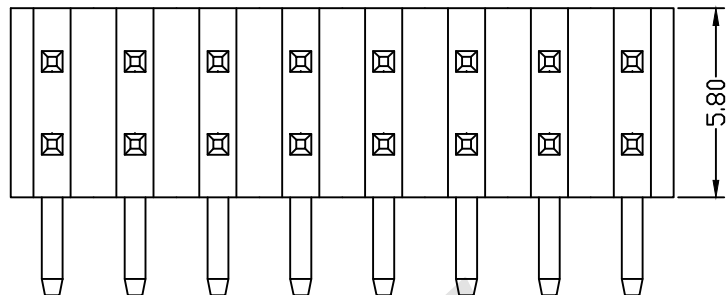

PCB LAYOUT

Standard IE P/N : PHER05-10-G0-D-0600-0300-A-B

A	B	Unless Otherwise specified tolerance	
6.00	3.00	X. XX: ±0.20	X. XXX: ±0.15
		X. X: ±0.25	

ANTEK ELECTRONICS CO., LTD  
[Http://www.antenk.com](http://www.antenk.com)  
 E-mail:sales@antenk.com

Optional		SCALE: As Shown	UNIT: mm
DRAW	YG ZHONG	DATE	01/05/2016
CHECK	BobYang	DATE	01/05/2016

TITLE: 2.54mm Pin Header DualRow Angle Type H:4.3

DRAWING NO: PHER05-XXD-0600-0300-XX  
 PRODUCT NO: PHER05-XXD-0600-0300-XX

REV	DESCRIPTION	DATE
	Increase packing method and material	2016/10/25

