
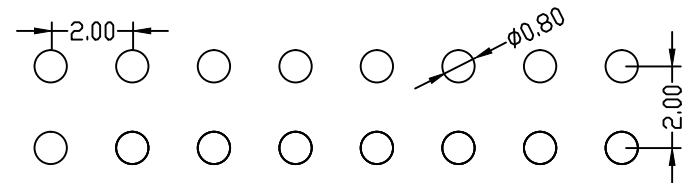
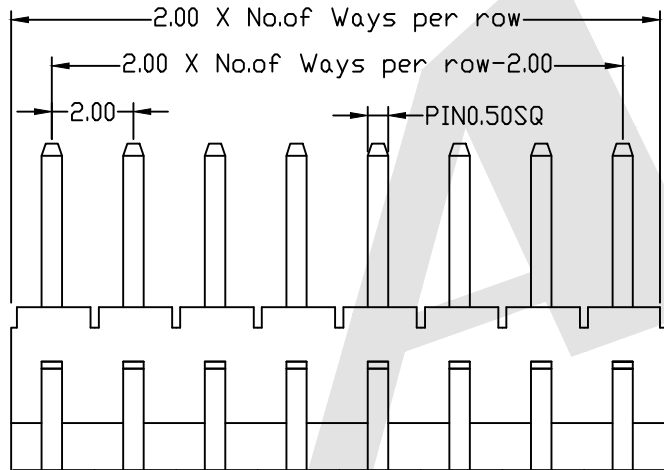


HSF

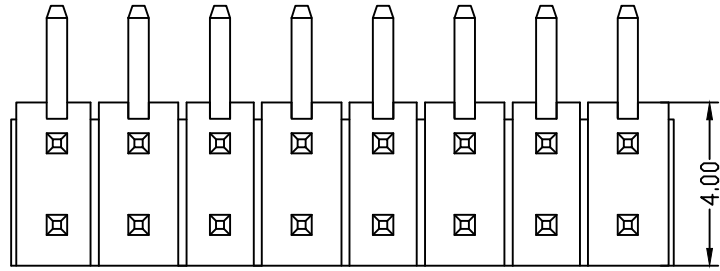

PCB LAYOUT

SPECIFICATION

Current Rating: 1.5 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PA6T, UL 94V-0 Black

Ordering Code:

PHDR05 - X - X - D - A-B - X - X

- ① Series No:
- ② No. of Contacts: 02 To 80
- ③ Contact Plating:
 G0: Gold flash S0: Selective
 G1: 3u" Gold S1: Selective 3u"
 G2: 5u" Gold S2: Selective 5u"
 G3: 10u" Gold S3: Selective 10u"
 G4: 15u" Gold S4: Selective 15u"
 G5: 30u" Gold S5: Selective 30u"
 SN: Tin
- ④ Connector Type: D: Dual
- ⑤ Pin Length:
 A: 0400=4.00mm
 B: 0280=2.80mm
 Please mark the desired length in the A/B
- ⑥ Insulator Material:
 A: PBT
 B: PA6T
 C: LCP
 D: PA46
 E: PA9T
- ⑦ Packing:
 A: Tray
 B: Bag
 T: Tube
 U: Tube+CAP
 R: Tape&Reel
 W: Tape&Reel+CAP

Standard IE P/N : PHDR05-10-G0-D-0400-0280-B-B

A	B	Unless Otherwise specified tolerance	
4.00	2.80	X. ±0.35	X.XX: ±0.20
		X.X: ±0.25	X.XXX: ±0.15
Optional	SCALE: As Shown	UNIT: mm	

Antenk ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

DRAW	DATE	TITLE: 2.00mm Pin Header DualRow Angle Type H:4.0
YG ZHONG	03/22/2016	
CHECK	DATE	
BobYang	03/22/2016	

REVISION	DESCRIPTION	DATE	DRAWING NO: PHDR05-XXD-0400-0280-XX
REV	Increase packing method and material	2016/10/25	PRODUCT NO: PHDR05-XXD-0400-0280-XX

