

National III emission standard

SR28MR-3

Powerful, tough, durable and designed with value in mind

- ▶ Engine model: Shangchai SC9DK260G3/ Weichai WP10G240
- ▶ Rated power: 193kW/2200rpm// 178kW/2200rpm
- ▶ Operating weight: 28.0 t

Product features

Designed for value durability and power specifically as a bulk waste management and landfill compactor, the 28-ton SR28MR-3 features four-wheel drive, torque converter, power shift transmission, stepless speed regulation and articulated frame. For operator productivity and safety, its dual cab comes standard with air conditioning, heating, air purification devices and even a CD stereo. Powered by a Shangchai engine.



SHANTUI

VALUE THAT WORKS

Shantui Construction Machinery Co., Ltd.

ADDRESS:
No. 58, G327 Highway
Jining City, Shandong, CHINA

TEL: +86-537-2909369
FAX: +86-537-2311219
EMAIL: trade@shantui.com

SR28MR-3

Technical specifications:

Overall length: 7930 mm


Minimum turning radius: 7250 mm


Overall width: 3660 mm


Fuel capacity: 450 L


Overall height: 3960 mm

SR28MR-3



	WEIGHT AND DIMENSIONS	Weights	Operating weight	28000 kg
			Axle load, front	14000 kg
			Axle load, rear	14000 kg
		Compaction characteristic	Static linear load, front/rear	618/762 N/cm
			Working width	3520 mm
			Drum diameter	1700 mm
Wheelbase	3500 mm			

	BLADE	Maximum lifting height	1146 mm
		Maximum cutting depth	150 mm
		Blade capacity	12 m ³

	ENGINE AND DRIVE TRAIN	Engine	Make & model	Shanghai SC9DK260G3/Weichai WP10G240	
			Type	Turbocharged	
			Fuel	Diesel	
			Cooling	Water	
			Number of cylinders	6	
			Rated power	193/178 kW	
			Rated speed	2200 rpm	
		Drive Train	Minimum ground clearance	465 mm	
			Maximum climbing ability	100%	
			Forward speed	I	0~4.82 km/h
				II	0~7.66 km/h
				III	0~11.6 km/h
			Reverse speed	I	0~4.82 km/h
II	0~7.66 km/h				
III	-				

	CABIN & CONTROLS	Brakes	Service brake	Pressurized air braking
			Parking brake	Mechanical
		Steering	Steering system	Oscillating, articulating
			Steering method	Hydrostatic
			Steering angle (Grad)	±36°
			Oscillating angle (Grad)	±8°

OVERALL DIMENSIONS

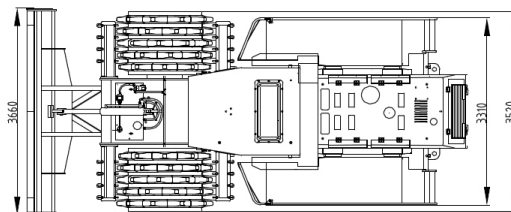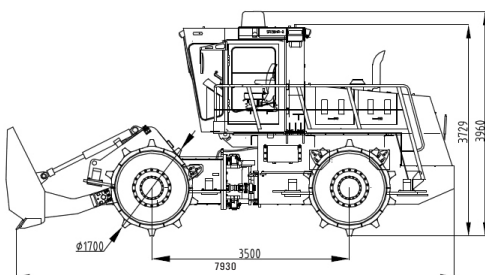

▶ THE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. THE PICTURES MAY INCLUDE OPTIONS. THE ACTUAL COLOR & APPEARANCE OF THE PRODUCT MAY DIFFER FROM WHAT IS SHOWN.