

320 HP

SD32-5(CE)

High-efficiency push factor

- ▶ Engine model: Cummins QSNT C345 (Euro Stage IIIA)
- ▶ Rated power : 257 kW/2000 rpm
- ▶ Operating weight: 39 t

Product features

The new SD32-5(CE) features a modular design conducive for ease of maintenance and repair. It has a hydraulic mechanical transmission and state-of-the-art shock absorbers. Its longer tracks create better traction, and the machine is able to perform at higher altitudes up to 3600m. The top-of-the-line hexahedron cab has ergonomic controls for operator ease and a real-time status and diagnostic screen. This machine is best for hard soil excavations, such as for mining, ports, oil fields, water conservation projects and hydropower dams. The "5" stands for fifth generation.



shantui e-shop

SHANTUI

VALUE THAT WORKS

Shantui Construction Machinery Co., Ltd.

ADDRESS:
No. 58, G327 Highway
Jining City, Shandong, CHINA

TEL: +86-537-2909369
FAX: +86-537-2311219
EMAIL: trade@shantui.com








320 HP

SD32-5(CE)



Technical specifications:

Blade Type	Heavy Duty Semi-U
Min. ground clearance:	485 mm
Ground pressure:	0.107 MPa
Minimum turning radius:	3.8 m
Gradeability:	30°
Track gauge:	2100 mm

SD32-5(CE)

	ENGINE	Model	Cummins QSNT C345		
		Rated revolution	2000 rpm		
		Rated power	257 kW		
		Cylinder number	6-149.7 x 152.4 mm (bore x stroke)		
		Piston displacement	14 L		
		Min. fuel consumption	220 g/kW-h		
		Max. torque	1509 N·m @ 1400rpm		
	POWER TRANSMISSION SYSTEM	Torque converter	3-element, 1 stage, 1 phase		
		Transmission	Planetary gear, multi-disc clutch, hydraulically connected, forced lubrication		
		Main drive	Spiral bevel gear, splash lubrication, single-stage speed reduction		
		Steering clutch	Lubricated, multi-disc, spring loaded, hydraulically separated, hydraulic control		
		Steering brake	Lubricated, multi-disc, spring loaded, hydraulically separated, hydraulic control, normally closed braking system		
		Final drive	2-stage speed reduction of spur gear, splash lubrication		
	TRAVEL SPEED	Gear	1st	2nd	3rd
		Forward	0~3.7 km/h	0~6.7 km/h	0~11.0 km/h
		Reverse	0~5.0 km/h	0~8.2 km/h	0~13.9 km/h
	UNDERCARRIAGE SYSTEM	Type	Oscillating equalizer bar and pivot shaft		
		Carrier rollers	2 each side		
		Track rollers	6 each side (single flange 4, double flange 2)		
		Track type	41 each side		
		Width of track shoes	560 mm		
	HYDRAULIC SYSTEM	Maximum pressure	20.6 MPa		
		Pump type	Gear pump		
		Discharge (at revolution of 2000 rpm)	234 L/min		
		Bore of working cylinder (Internal Bore Diameter/External Bore Diameter) × no.	120 mm× 2		
	BLADE	Blade type	Semi-U blade		
		Dozing capacity	11.7 m³		
		Blade width	3955 mm		
		Blade height	1680 mm		
		Maximum drop below ground	589 mm		
		Maximum tilt adjustment	656 mm		
		Weight of blade	4420 kg		
	RIPPER (OPTIONAL)	Maximum digging depth of 3-shank ripper	606 mm		
		Maximum lift above ground	938 mm		
		Weight of 3-shank ripper	3338 kg		
		Maximum digging depth of single ripper	596 mm		
		Maximum lift above ground	940 mm		
		Weight of single ripper	2626 kg		

OVERALL DIMENSIONS Semi-U blade

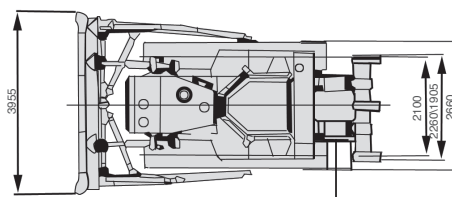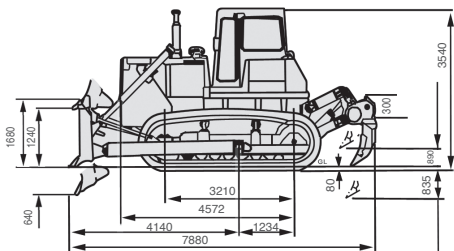

▶ THE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. THE PICTURES MAY INCLUDE OPTIONS. THE ACTUAL COLOR & APPEARANCE OF THE PRODUCT MAY DIFFER FROM WHAT IS SHOWN.